

WAAS
CH **69515**
W24A

APP CRS
235°

Rwy Ldg
TDZE **681**
Apt Elev **681**

RNAV (GPS) RWY 24

MAURY COUNTY RGNL (MRC)

RNP APCH.

▽

⚠

Inop table does not apply to LNAV/VNAV Cats A, B, and C and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 24 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Nashville Intl altimeter setting and increase LPV DA to 1090 feet and LNAV/VNAV DA to 1438 feet and increase all MDA 120 feet; increase LPV and LNAV/VNAV all Cats visibility ½ SM, and LNAV Cats C and D visibility ¼ SM, and increase Circling Cat C visibility ½ SM. Baro-VNAV and VDP NA when using Nashville Intl altimeter setting.

ODALS

⬆


⬆

⬆

MISSED APPROACH:

Climb to 3000 direct CEMVU and hold.

AWOS-3 128.625	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF) ①
--------------------------	--	---------------------------------

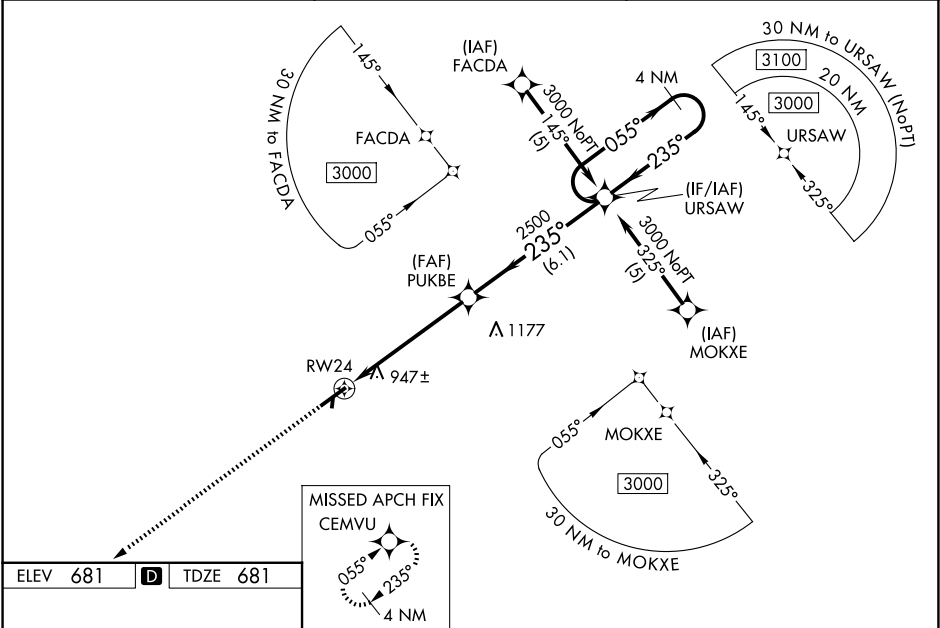

ELEV **681** **D** TDZE **681**

235°

⬆

3000

CEMVU

*LNAV only.

3000

CEMVU

3000

CEMVU

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

4 NM

Holding Pattern

055°

235°

3000

GP 3.00°

TCH 40

1.6 NM

3.9 NM

6.1 NM

CATEGORY

A

B

C

D

LPV DA

981-1

300 (300-1)

LNAV/ VNAV DA

1329-2¼

648 (700-2¼)

LNAV MDA

1220-¾

539 (600-¾)

1220-1½

539 (600-1½)

1220-1¾

539 (600-1¾)

CIRCLING

1320-1

639 (700-1)

1360-1

679 (700-1)

1380-2

699 (700-2)

1620-3

939 (1000-3)

COLUMBIA/MOUNT PLEASANT, TENNESSEE

MAURY COUNTY RGNL (MRC)

Orig-B 09SEP21

35°33'N-87°11'W

RNAV (GPS) RWY 24