

WAAS CH 86204 W34A	APP CRS 341°	Rwy Idg 7500 TDZE 4365 Apt Elev 4365
--	------------------------	---

RNAV (GPS) RWY 34
NORTHEAST WYOMING RGNL (GCC)

RNP APCH.


T Circling Rwy 3 NA at night. Inop table does not apply to LPV and LNAV/VNAV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. For inop ALS, increase LNAV Cat A visibility to 1 SM, and Cat C/D to 2 SM. Rwy 34 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MALSR



MISSED APPROACH:
Climb to 7000 direct
ACITU and on track 264°
to MIDGE and hold.

ASOS 124.175	DENVER CENTER 135.6 363.025	UNICOM 122.95	CTAF 118.50
-----------------	--------------------------------	------------------	----------------

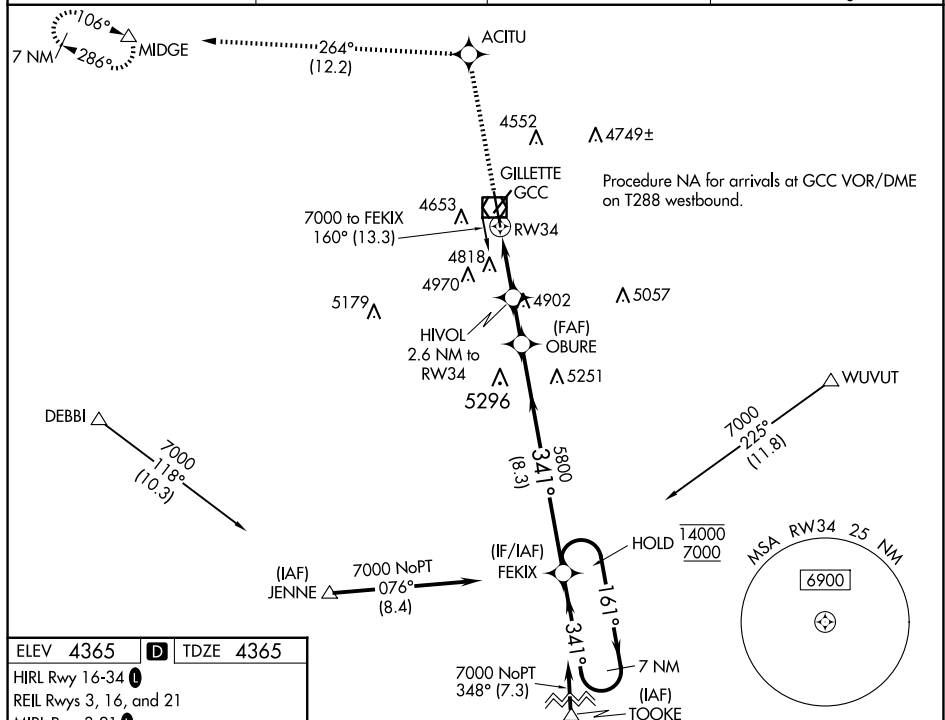

ELEV 4365 **D** TDZE 4365

HIRL Rwy 16-34 **L**
REIL Rwys 3, 16, and 21
MIRL Rwy 3-21 **L**

9L
0.4% UP
5800 X 75
0.4% UP
7500 X 150
34
341° to RWY 34

7000 ↑	ACTU ✦	tr 264° △	VGSI and RNAV glidepath not coincident. (VGSI Angle 3.20/TCH 56)				7 NM Holding Pattern
*LNAV only.		HIVOL 2.6 NM to RW34	OBURE	FEKIX			
RW34		*2.1 NM to RW34	5800	341°	161° → 14000 ← 341° 7000		
		5240*	5800			GP 3.00° TCH 52	
2.1 NM		0.5	1.7 NM	8.3 NM			
CATEGORY	A	B		C		D	
LPV DA	4620-3/4		255 (300-3/4)				
LNAV/ VNAV	DA	5480-4		1115 (1200-4)			
LNAV MDA	5120-3/4	755 (800-3/4)		5120-13/4		755 (800-13/4)	
CIRCLING	5120-1 755 (800-1)	5240-11/4 875 (900-11/4)		5400-3		1035 (1100-3)	

NW-1, 22 JAN 2026 to 19 FEB 2026