

WAAS
CH **72619**
W18A

APP CRS
183°

Rwy Idg **5404**
TDZE **173**
Apt Elev **173**

RNAV (GPS) RWY 18

FLETCHER FLD (CKM)

RNP APCH-GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Tunica altimeter setting. When local altimeter setting not received, use Tunica altimeter setting: increase LPV DA to 483 feet, LNAV/VNAV DA to 647 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, and LNAV Cat C/D visibility ½ SM. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2000 direct HULON and hold.

AWOS-3 120.675	MEMPHIS CENTER 135.3 335.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

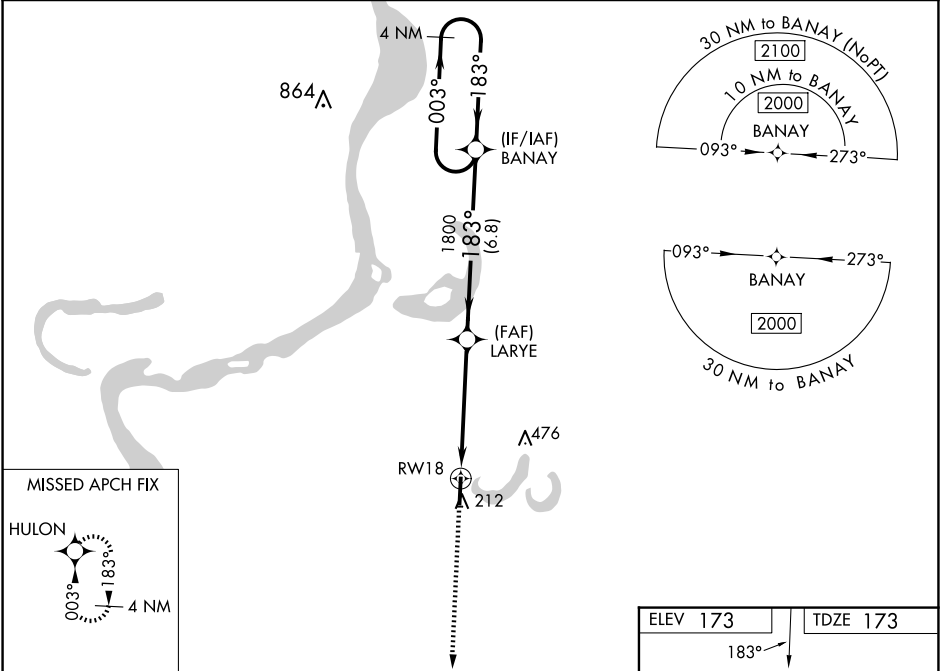

2000

↑

HULON



4 NM

Holding Pattern

LARYE

1800

BANAY

2000

1.4 NM to RW18

183°

003° →

← 183°

GP 3.00°

TCH 40

RW18

1.4 NM

3.6 NM

6.8 NM

1800

CATEGORY	A	B	C	D
LPV DA	423-7⁄8	250 (300-7⁄8)		
LNAV/VNAV DA	587-13⁄8	414 (500-13⁄8)		
LNAV MDA	640-1 467 (500-1)	640-13⁄8 467 (500-13⁄8)		
CIRCLING	740-1 567 (600-1)	780-13⁄4 607 (700-13⁄4)	780-2 607 (700-2)	

