

LOC/DME I-RBW	APP CRS	Rwy Ldg	5977
110.15	229°	TDZE	101
Chan 38 (Y)		Apt Elev	101

ILS Y or LOC Y RWY 23

LOWCOUNTRY RGNL (R.BW)

DME required.

▼



▲

Rwy 23 helicopter visibility reduction below ¾ SM NA.
Inop table does not apply to S-LOC 23 all Cats.

ODALS

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 on heading 360° and CHS VORTAC R-282 to STOAS/CHS VORTAC 34.3 DME and hold, continue climb-in-hold to 2000, or as directed by ATC.

AWOS-3PT 118.725	CHARLESTON APP CON 120.7 306.925	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

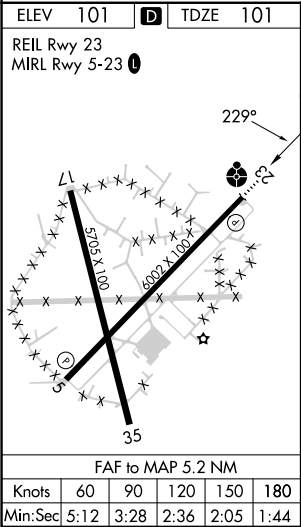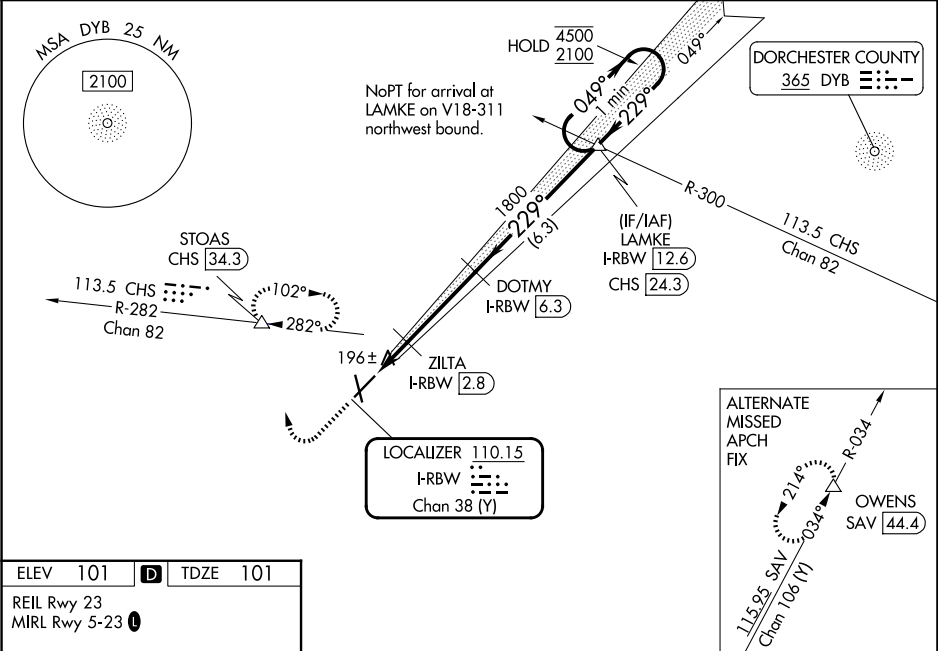

700	2000	CHS R-282	STOAS	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 46).	One Minute Holding Pattern
↑	hdg 360°				
		ZILTA I-RBW 2.8	DOTMY I-RBW 6.3	LAMKE I-RBW 12.6	
		I-RBW 1.1	I-RBW 2.1	1800	049° 4500 229° 2100
		680	1800		GS 3.00° TCH 43
	1 NM	0.7	3.5 NM	6.3 NM	
CATEGORY	A	B	C	D	
S-ILS 23	301-¾ 200 (200-¾)				
S-LOC 23	460-¾ 359 (400-¾)		460-⅞ 359 (400-⅞)		
CIRCLING	620-1 519 (600-1)		700-1½ 599 (600-1½) 700-2 599 (600-2)		