


WAAS CH 61225 W32A	APP CRS 316°	Rwy ldg TDZE 4176 Apt Elev 4176
--	------------------------	---

RNAV (GPS) RWY 32

MONDELL FLD (E/C/S)

RNP APCH. ▼ When Newcastle altimeter setting not received, procedure NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C (-9°F) or above 53°C (128°F). Circling NA northeast of Rwy 14-32. For inop ODAL, increase LNAV/VNAV visibility all Cats and LNAV Cats C/D ½ mile. Inop table does not apply to LPV all Cats and LNAV Cats A/B.	ODALS ☼ MISSED APPROACH: Climb to 9500 direct PULVE and hold, continue climb-in-hold to 9500.
--	---

AWOS-3PT 118.0	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

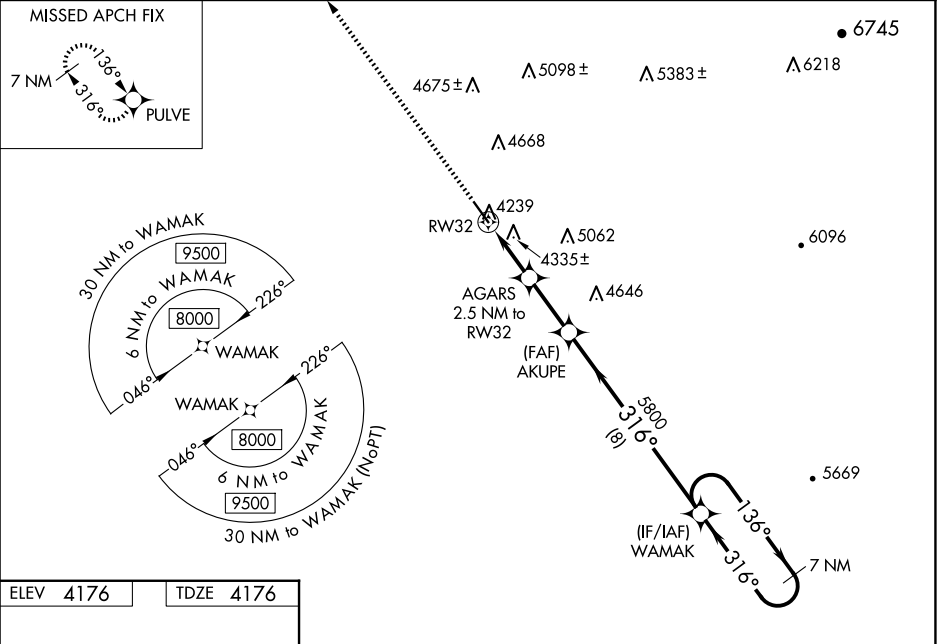

ELEV 4176	TDZE 4176	9500 PULVE *LNAV only. AGARS 2.5 NM to RW32 *1.2 NM to RW32 RW32 1.2 NM 1.3 NM 2.5 NM 8 NM WAMAK 7 NM Holding Pattern 136° 8000 316° 5800 GP 3.00° TCH 43			
CATEGORY		A	B	C	D
LPV DA		4385-1 209 (300-1)			
LNAV/VNAV DA		4618-1½ 442 (500-1½)			
LNAV MDA		4600-1 424 (500-1)	4600-1½ 424 (500-1½)		
CIRCLING		4700-1 524 (600-1)	4720-1½ 544 (600-1½)	5000-2¾ 824 (900-2¾)	