

WAAS CH 70501 W28A	APP CRS 279°	Rwy Idg TDZE Apt Elev	2502 108 108
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28
BLOCK ISLAND STATE (BID)

▼ DME/DME RNP-0.3 NA. If local altimeter setting not received, use Westery State altimeter setting and increase all DAs/MDAs 40 feet. Baro-VNAV and ▲ VDP NA when using Westery State altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F).	MISSED APPROACH: Climb to 1500 direct CUGDA and on track 287° to SUFOK and hold.
---	--

AWOS-3PT 134.775	PROVIDENCE APP CON ★ 125.75 319.2	CLNC DEL 120.1	UNICOM 123.0 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

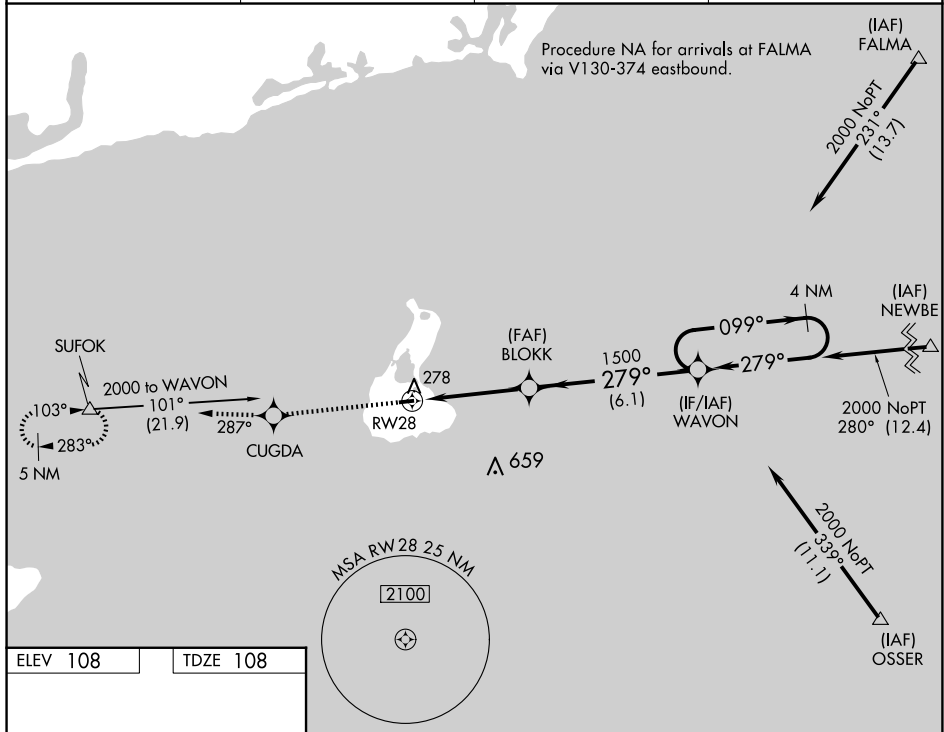


Diagram illustrating the RWY 28 approach procedure. The approach is a 1.3 NM climb to RWY 28, followed by a 2.9 NM segment to BLOKK, and a 6.1 NM segment to WAVON. The final 4 NM segment is a holding pattern. The approach is for 1500 ft, with a 1.3 NM climb to RWY 28, and a 2.9 NM segment to BLOKK. The final 6.1 NM segment is a holding pattern.

RNAV (GPS) RWY 28