



|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>90418</b><br><b>W17A</b> | APP CRS<br><b>165°</b> | Rwy Ldg<br>TDZE <b>246</b><br>Apt Elev <b>246</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 17

BARNWELL RGNL (BNL)

|                                                                                                                                                                                    |       |                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------------------------------------|
| RNP APCH.                                                                                                                                                                          | ODALS | MISSED APPROACH: Climb to 2100 direct CULPA and hold. |
| Circling Rwy 5, 23 NA at night. Inop table does not apply to LPV, LNAV/VNAV all Cats, and LNAV Cat C. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. |       |                                                       |

|                            |                                             |                       |                               |
|----------------------------|---------------------------------------------|-----------------------|-------------------------------|
| AWOS-3PT<br><b>119.775</b> | JACKSONVILLE CENTER<br><b>132.925 363.2</b> | GCO<br><b>121.725</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|---------------------------------------------|-----------------------|-------------------------------|

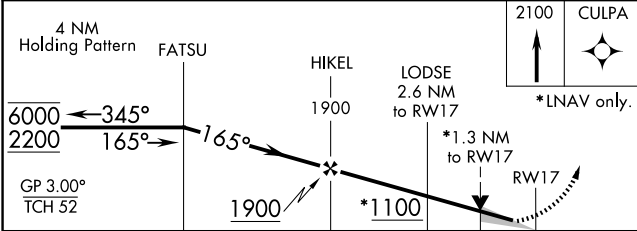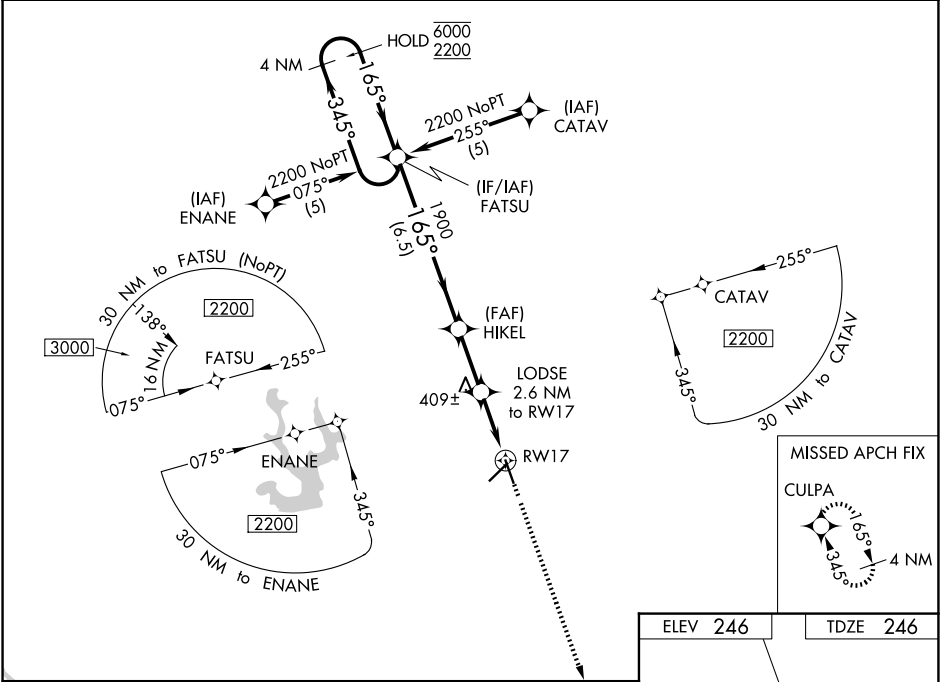

| CATEGORY     | A     | B           | C                      | D                      |
|--------------|-------|-------------|------------------------|------------------------|
| LPV DA       |       | 496-¾       | 250 (300-¾)            |                        |
| LNAV/VNAV DA |       | 604-1¼      | 358 (400-1¼)           |                        |
| LNAV MDA     | 700-¾ | 454 (500-¾) | 700-1¼<br>454 (500-1¼) | 700-1½<br>454 (500-1½) |
| CIRCLING     | 700-1 | 454 (500-1) | 900-1¾<br>654 (700-1¾) | 900-2<br>654 (700-2)   |

