

WAAS CH 77735 W09A	APP CRS 093°	Rwy Ldg TDZE 1198 Apt Elev 1198
--	------------------------	---

RNAV (GPS) RWY 9

PORTAGE COUNTY (POV)


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not recieved, use CAK altimeter setting and increase LPV DA to 1498 feet. Increase LNAV/VNAV DA to 1557 feet. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct WHINR and hold, continue climb-in-hold to 4000.

AWOS-3 118.675	CLEVELAND APP CON★ 125.5 371.875	CLNC DEL 125.65	UNICOM 123.05 (CTAF) 0
--------------------------	--	---------------------------	---

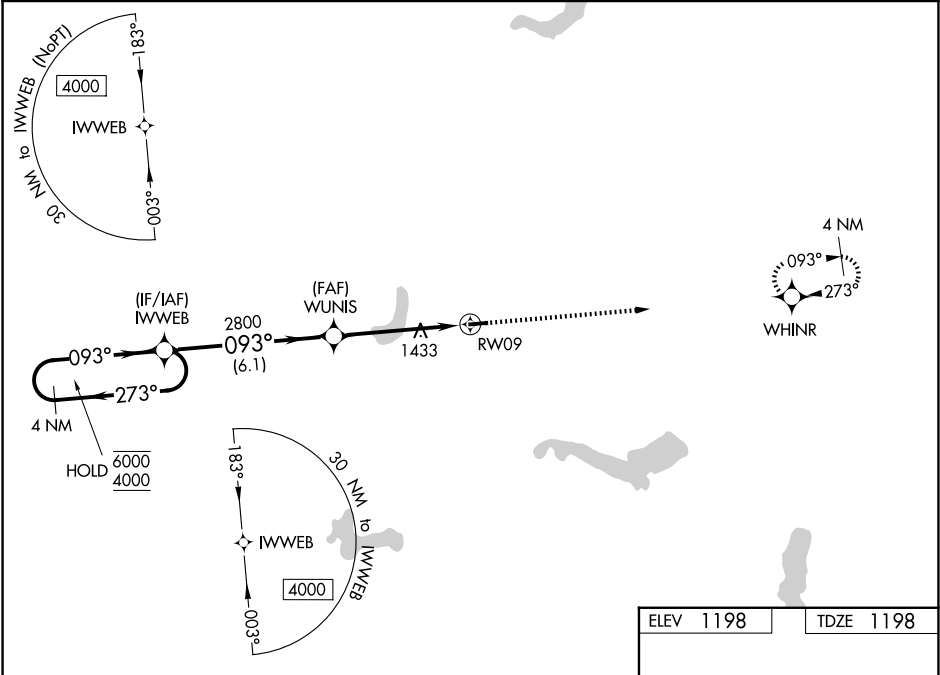

4 NM Holding Pattern		IWWEB	WUNIS	1.5 NM to RWY9	4000	WHINR
6000 ← 273°		4000 → 093°	2800	2800	2800	2800
GP 3.00°		TCH 40	6.1 NM	3.5 NM	1.5 NM	093°
CATEGORY	A	B	C	D		
LPV DA	1448-1	250 (300-1)		NA		
LNAV/VNAV DA	1507-1	309 (400-1)		NA		
LNAV MDA	1700-1	502 (600-1)	1700-1⅜ 502 (600-1⅜)	NA		
CIRCLING	1740-1 542 (600-1)	1800-1 602 (700-1)	1860-1¾ 662 (700-1¾)	NA		

REIL Rwy 9 and 27 **0**
MIRL Rwy 9-27 **0**