

WAAS
CH **40115**
W33A

APP CRS
326°

Rwy Idg
TDZE
Apt Elev
4000
1025
1025

RNAV (GPS) RWY 33

PLATTEVILLE MUNI (PVB)

RNP APCH - GPS

▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use DBQ altimeter setting and increase LPV DA to 1331 feet; increase LNAV/VNAV DA to 1497 feet and all Cts visibilities ¼ SM; increase all MDAs 60 feet, increase LNAV and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using DBQ altimeter setting. Circling Rwy 7, 25 NA at night.

MISSED APPROACH:
Climb to 3000 direct CEWUF and hold.

AWOS-3
120.575

CHICAGO CENTER
133.95 281.4

UNICOM
122.7 (CTAF) 0

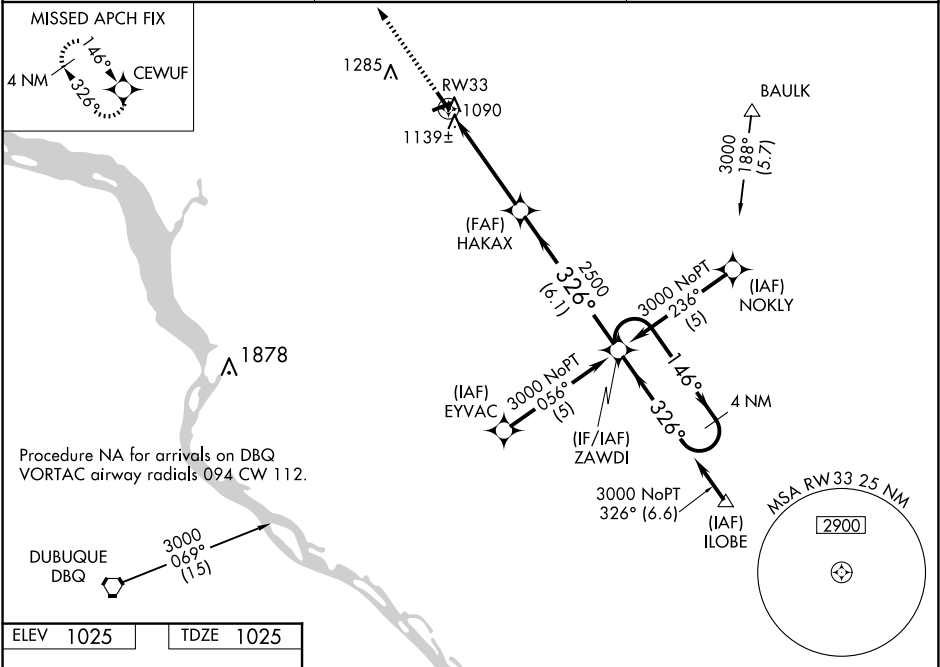

ELEV 1025

TDZE 1025

3000

CEWUF

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

4 NM
Holding Pattern

* LNAV only

HAKAX

ZAWDI

146°

3000

326°

2500

GP 3.00°
TCH 40

1.1 NM

3.4 NM

6.1 NM

1.1 NM to RW33

0.8% UP

3600 X 75

4000 X 75

326°

REIL Rwy 15 and 33

MIRL Rwy 7-25 and 15-33

CATEGORY	A	B	C	D
LPV DA	1275-1	250 (300-1)		NA
LNAV/ VNAV DA	1441-1½	416 (500-1½)		NA
LNAV MDA	1400-1	375 (400-1)		NA
CIRCLING	1460-1 435 (500-1)	1600-1 575 (600-1)	1600-1½ 575 (600-1½)	NA