

WAAS CH 97702 W07A	APP CRS 068°	Rwy Ldg 5004 TDZE 932 Apt Elev 949
--	------------------------	---

RNAV (GPS) RWY 7

GREENE COUNTY/LEWIS A JACKSON RGNL (GDK)

RNP APCH - GPS.


▼

▲

When local altimeter setting not received, use Dayton/Wright Brothers altimeter setting: increase LPV DA to 1235 feet; increase LNAV/VNAV DA to 1268 feet; increase all MDA 40 feet and LNAV visibility Cat C ½ SM. Rwy 7 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Dayton/Wright Brothers altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH:
Climb to 2700 direct TUNNU and hold.

AWOS-3 118.525	COLUMBUS APP CON 118.85 269.275	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

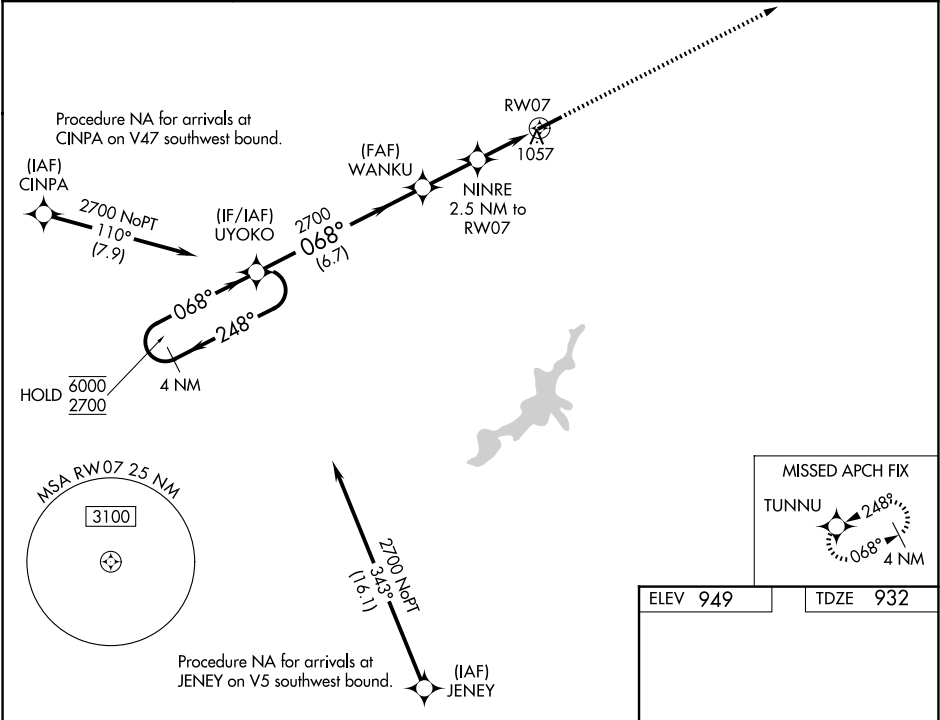

4 NM

Holding Pattern

6000

2700

← 248°

→ 068°

UYOKO

WANKU

2700

NINRE

2.5 NM to RW07

1 NM to RW07

RW07

1860

2700

6.7 NM

2.2 NM

1.5

1 NM

GP 3.50°

TCH 40

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.50/TCH 30).

2700

TUNNU

5004 X 75

0.8% UP

068°

25

MIRL Rwy 7-25

REIL Rws 7 and 25

CATEGORY		A		B		C		D	
LPV	DA	1205-1		273 (300-1)				NA	
LNAV/VNAV	DA	1238-1		306 (300-1)				NA	
LNAV	MDA	1320-1	388 (400-1)	1320-1 388 (400-1 3/4)				NA	
CIRCLING		1480-1	531 (600-1)	1560-1 611 (700-1 3/4)				NA	