


RNP APCH - GPS.

⚠ Circling Rwy 1 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 19 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using FKN altimeter setting. When local altimeter setting not received, use FKN altimeter setting and increase LPV DA to 434 feet; increase LNAV/VNAV DA to 515 feet and all visibilities ¾ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3000 direct ILTOJ and hold, continue climb-in-hold to 3000.

AWOS-3 119.075	WASHINGTON CENTER 123.85 279.65	UNICOM 122.8 (CTAF) 0
-------------------	------------------------------------	--------------------------

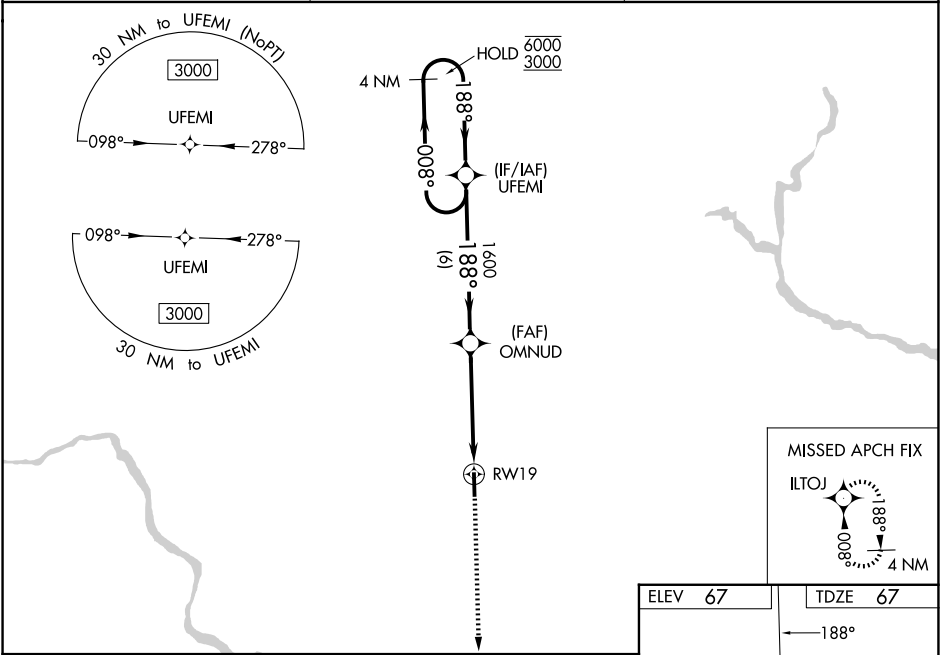

4 NM Holding Pattern				
UFEMI				
6000 3000				
GP 3.00° TCH 40				
OMNUD 1600				
1.4 NM to RWY 19				
RWY 19				
6 NM 3.3 NM 1.4				
CATEGORY	A	B	C	D
LPV DA	365-1 298 (300-1)			
LNAV/VNAV DA	446-1 379 (400-1)			
LNAV MDA	540-1	473 (500-1)	540-1 ¾	473 (500-1 ¾)
CIRCLING	540-1	473 (500-1)	540-1 ½	820-2 ½

