

WAAS CH 53702 W36A	APP CRS 005°	Rwy Idg 6500 TDZE 764 Apt Elev 764
--	------------------------	---

RNAV (GPS) RWY 36

HUNTSVILLE EXEC TOM SHARP JR FLD (MDQ)

RNP APCH.



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.


MISSED APPROACH: Climb to 3400 direct EROVE and hold.

AWOS-3PT
120.0

HUNTSVILLE APP CON★
125.6 354.1

GCO
121.725

UNICOM
123.0 (CTAF) **L**

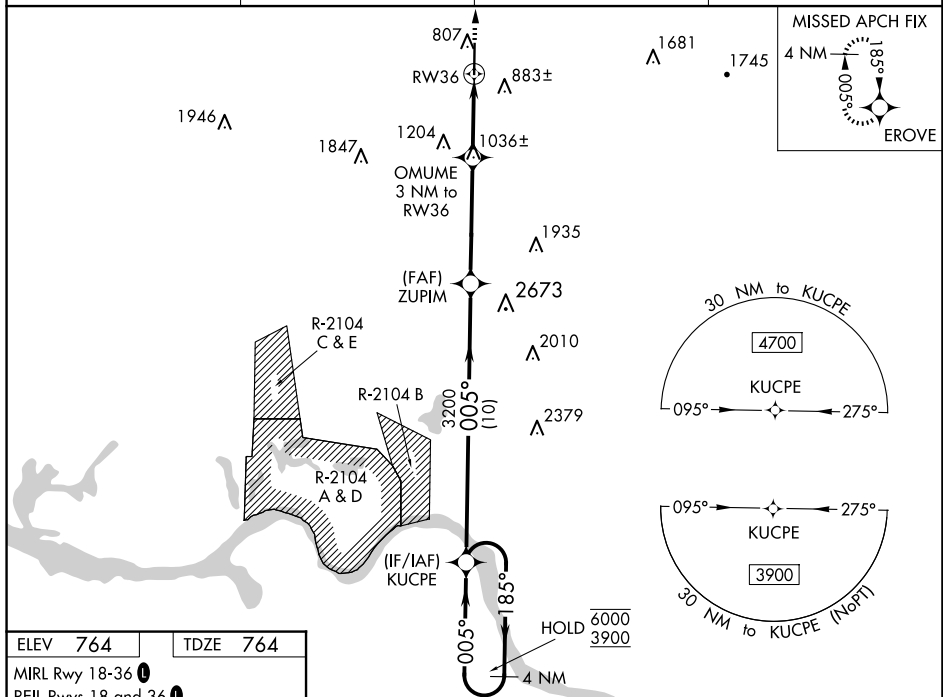

***LNAV only.**

4 NM Holding Pattern

KUCPE

OMUME
3 NM to RW36

ZUPIM
3200

RW36

185° → 6000
← 005° 3900

005°

3200

GP 3.00°
TCH 45

1.6 NM | 1.4 NM | 4.5 NM | 10 NM

CATEGORY	A	B	C	D
LPV DA	964-3/4		200 (200-3/4)	
LNAV/VNAV DA	1250-1 5/8		486 (500-1 5/8)	
LNAV MDA	1300-1	536 (600-1)	1300-1 1/2	536 (600-1 1/2)
C CIRCLING	1300-1	536 (600-1)	1560-2 1/4 796 (800-2 1/4)	2000-3 1236 (1300-3)

RNAV (GPS) RWY 36