

WAAS CH 78136 W28A	APP CRS 279°	Rwy Idg 3950 TDZE 153 Apt Elev 153
--	------------------------	---


RNAV (GPS) RWY 28

PLANT CITY (PCM)

▼ Baro-VNAV NA when using Lakeland altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Night landing: Rwy 28 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received use Lakeland altimeter setting and increase all DA/MDA 20 feet.

MISSED APPROACH:
Climb to 2000 direct
UJURO and hold.

AWOS-3 120.025	TAMPA APP CON 120.65 290.3	CLNC DEL 121.725 (GCO)	UNICOM 123.05 (CTAF) 0
--------------------------	--------------------------------------	----------------------------------	---

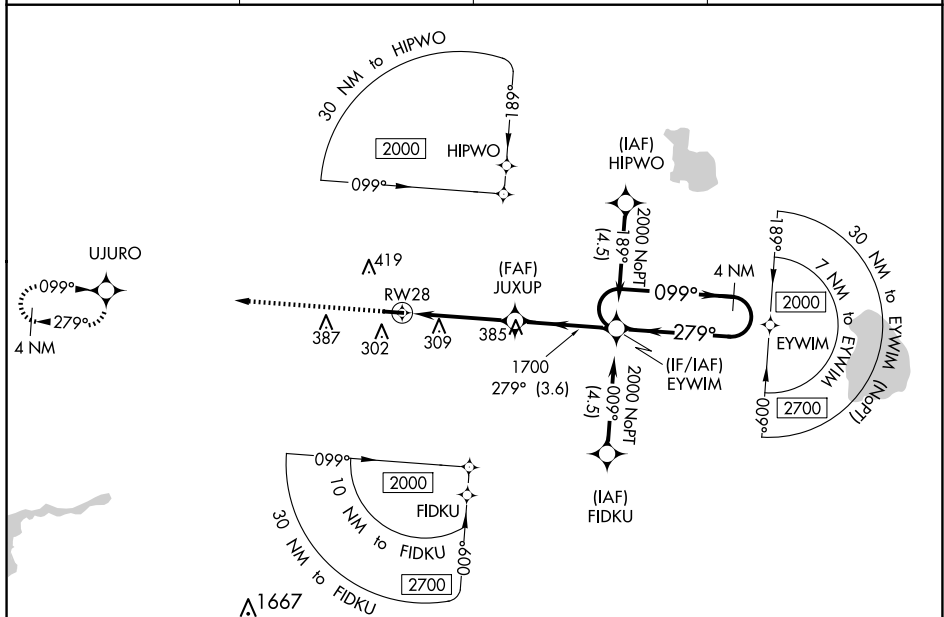

ELEV 153		TDZE 153
----------	--	----------



2000

UJURO

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00/TCH 36).

4 NM
Holding Pattern

JUXUP

1700

EYWIM

099° → 2000

← 279°

RW28

4.1 NM

3.6 NM

GP 3.50°
TCH 57

CATEGORY	A	B	C	D
LPV DA	414-1	261 (300-1)	NA	
RNAV/ VNAV DA	459-1	306 (400-1)	NA	
RNAV MDA	600-1	447 (500-1)	NA	
C CIRCLING	680-1 527 (600-1)	720-1 567 (600-1)	NA	