

WAAS

CH **86237**

**W21A**

APP CRS

**213°**

Rwy Idg

**5000**

TDZE

**75**

Apt Elev

**75**

**RNAV (GPS) RWY 21**

MARTIN COUNTY (MCZ)

RNP APCH - GPS.


▼

▲

Circling Rwy 3 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 2400 direct TALOE and hold, continue climb-in-hold to 2400.

|                          |                                           |                                 |
|--------------------------|-------------------------------------------|---------------------------------|
| AWOS-3P<br><b>118.65</b> | WASHINGTON CENTER<br><b>123.85 279.65</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-------------------------------------------|---------------------------------|

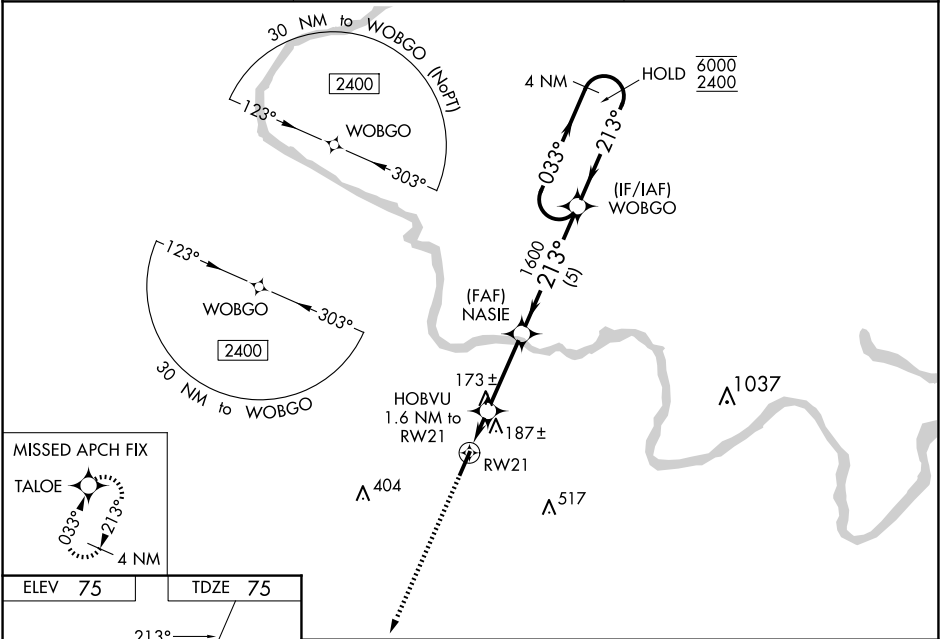

ELEV 75

TDZE 75

213°

21

5000 X 75

3

2400

TALOE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).

HOBVU 1.6 NM to RW21

NASIE 1600

1.1 NM to RW21

1.1

0.6

3 NM

5 NM

WOBGO

4 NM Holding Pattern

033° → 6000

← 213° 2400

GP 3.00° TCH 45

| CATEGORY     | A                    | B                    | C                      | D                      |
|--------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA       |                      | 383-1                | 308 (400-1)            |                        |
| LNAV/VNAV DA |                      | 343-1                | 268 (300-1)            |                        |
| LNAV MDA     |                      | 440-1                | 365 (400-1)            |                        |
| CIRCLING     | 500-1<br>425 (500-1) | 540-1<br>465 (500-1) | 680-1¾<br>605 (700-1¾) | 880-2½<br>805 (900-2½) |