

WAAS CH 45818 W18A	APP CRS 180°	Rwy Ldg TDZE Apt Elev	5001 44 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 18

HAMMOND NORTHSHORE RGNL (HDC)

RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Louis Armstrong New Orleans Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Louis Armstrong New Orleans Intl altimeter setting and increase LPV DA to 339 feet; increase LNAV/VNAV DA to 555 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM. For inop ALS when using Louis Armstrong New Orleans Intl altimeter increase LPV all Cats visibility to ¾ SM; LNAV/VNAV all Cats visibility to 1¾ SM and LNAV Cats C/D visibility to 1¾ SM. For inop ALS increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cat C/D visibility to 1¼ SM.

MALS

⬆

A5


⬆

⬆

MISSED APPROACH:

Climb to 2200 direct IYRON and hold.

ATIS 118.325	NEW ORLEANS APP CON 119.3 350.35	HAMMOND TOWER ★ 120.575 (CTAF) 0	GND CON 119.85	CLNC DEL 119.3 (When twr closed)
------------------------	--	---	--------------------------	---

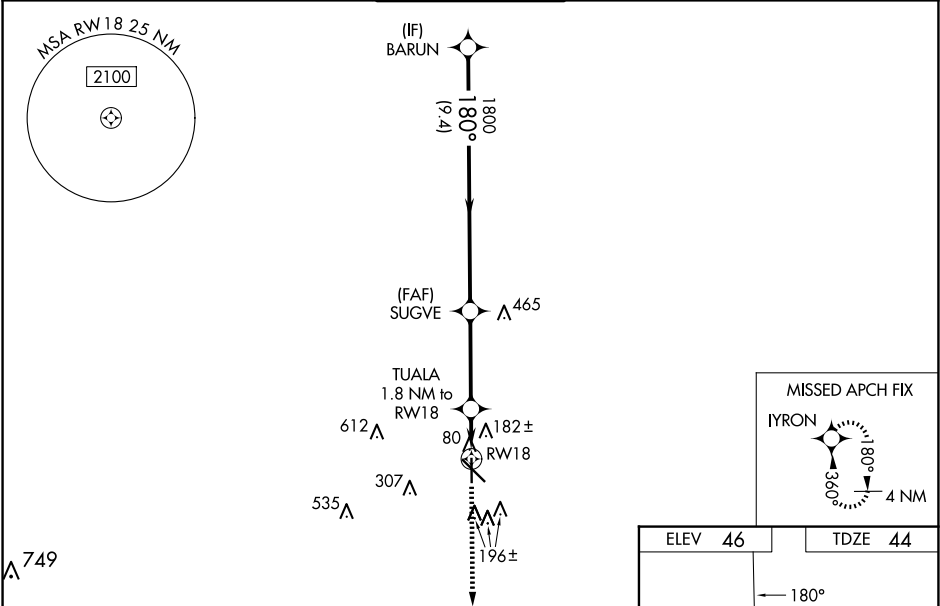

BARUN		SUGVE		TUALA		RW18	
1800		1800		1800		660	
GP 3.00°		1800		1.1 NM to RW18		1.1 NM	
TCH 52		9.4 NM		3.5 NM		0.7 NM	
CATEGORY	A	B	C	D			
LPV DA	250-1/2		206 (300-1/2)				
LNAV/VNAV DA	466-3/4		422 (500-3/4)				
LNAV MDA	460-1/2		416 (500-1/2)		460-3/4		416 (500-3/4)
CIRCLING	500-1		454 (500-1)		620-1 1/2		920-2 3/4
					574 (600-1 1/2)		874 (900-2 3/4)

ELEV 46

TDZE 44

2200

IYRON

TWR

36

REIL Rwy 13, 31 and 36

MIRL Rwy 13-31 and 18-36