


LOC/DME I-RRR	APP CRS	Rwy Ldg	8373
110.9	311°	TDZE	523
Chan 46		Apt Elev	607


ILS or LOC RWY 31R

DALLAS-FORT WORTH INTL (DFW)

Simultaneous approach authorized. DME required. For inop ALS increase S-LOC 31R GUKSE FIX minimums Cat C/D visibility to RVR 5500.		MALSR	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 125° and TTT VOR/ DME R-084 to SOLD0/TTT 35.8 DME and hold.		
D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	135.5 125.2	126.55 127.5 124.15 134.9	121.65 121.8 121.85 WEST	128.25	

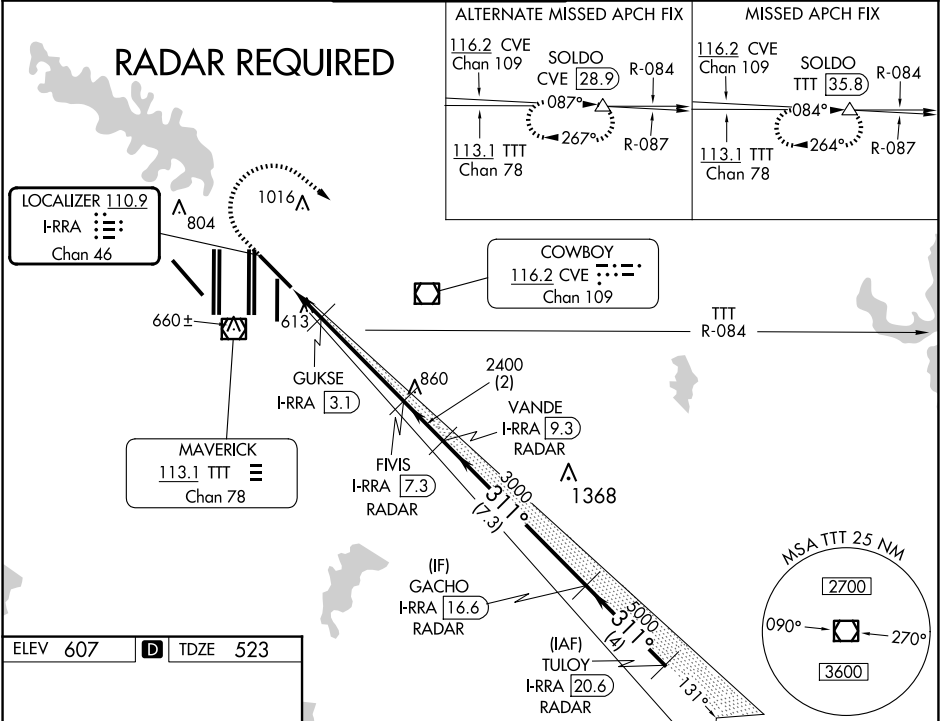

ELEV 607	D	TDZE 523
----------	---	----------

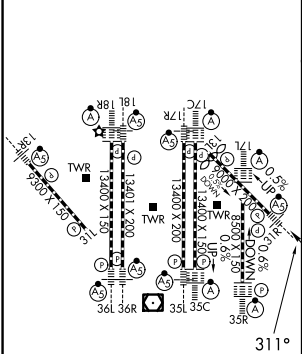

HIRL all Rwy					
REIL Rwy 13L and 31L					
TDZ/CL all Rwy except 13L and 31L					
FAF to MAP 5.8 NM					
Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

1100	3000	TTT	SOLD0						
hdg 125°	R-084								
*LOC only.									
I-RRR 1.6	I-RRR 2.5	I-RRR 3.1	GUKSE RADAR	FIVIS I-RRR 7.3	VANDE I-RRR 9.3	GACHO I-RRR 16.6	TULYO I-RRR 20.6		
1060*	2400	311°	311°	5000	5000	5000	5000	5000	5000
0.9	0.6	4.2 NM	2 NM	7.3 NM	4 NM				
CATEGORY	A	B	C	D					
S-ILS 31R	723/18	200 (200-½)							
S-LOC 31R	1060/24	537 (500-½)	1060/55	537 (500-1¼)					
GUKSE FIX MINIMUMS									
S-LOC 31R	880/24	357 (300-½)	880/30	357 (300-¾)					