


APP CRS 135°	Rwy Ldg 9300 TDZE 591 Apt Elev 606	RNAV (RNP) Z RWY 13R DALLAS-FORT WORTH INTL (DFW)
------------------------	---	---

RNP AR APCH. RF required. For uncompensated Baro-VNAV systems, procedure NA below -6°C or above 54°C. Missed approach requires RNP less than 1.0.		MALSR 	MISSED APPROACH: (Do not exceed 185K until HRNTT) Climb to 3000 on the RNAV missed approach route to SLOTT and hold.		
D-ATIS ARR 123.775 DEP 135.925	LONE STAR APP CON 133.15 118.1	DFW TOWER 126.55 127.5 EAST 124.15 134.9 WEST	GND CON 121.65 121.8 EAST 121.85 WEST	CLNC DEL 128.25	CPDLC

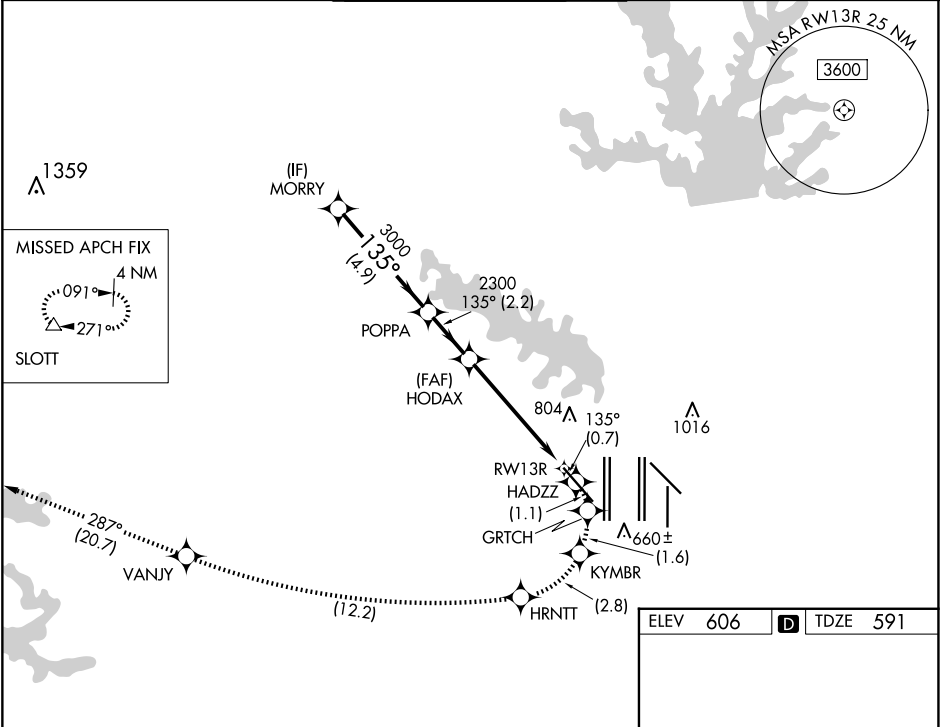

3000 ↑ tr 135°	HADZZ ✧↗	GRTCH ✧↗	KYMBR ✧↗	HRNTT ✧↗	VANJY ✧↗	tr 287°	SLOTT △
MORRY		POPPA		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).			
3000 135°		3000 135°		2300 135° RW13R			
GP 3.00° TCH 55		4.9 NM		2.2 NM		5.2 NM	
CATEGORY	A		B		C		D
RNP 0.30 DA	1041/45		450 (500-7%)				
AUTHORIZATION REQUIRED							

135°

HIRL all Rwy's
REIL Rwy's 13L and 31L
TDZ/CL all Rwy's except 13L and 31L

HIRL all Rwy's
REIL Rwy's 13L and 31L
TDZ/CL all Rwy's except 13L and 31L