

APP CRS	Rwy Ldg	8373
311°	TDZE	523
	Apt Elev	607



RNAV (RNP) Z RWY 31R
DALLAS-FORT WORTH INTL (DFW)

▼ For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). For inop MALS, increase RNP 0.14 all Cats visibility to RVR 5100, RNP 0.23 all Cats visibility to 1½ mile, RNP 0.30 all Cats visibility to 1½ mile. Simultaneous approach authorized with Rwy 31L. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALS

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SOLDO and hold.

D-ATIS	LONE STAR APP CON	DFW TOWER	GND CON	CLNC DEL	CPDLC
ARR 123.775 DEP 135.925	135.5 125.2	126.55 127.5 EAST 124.15 134.9 WEST	121.65 121.8 EAST 121.85 WEST	128.25	

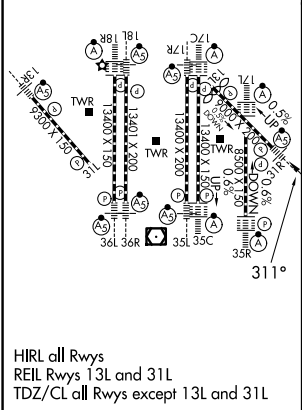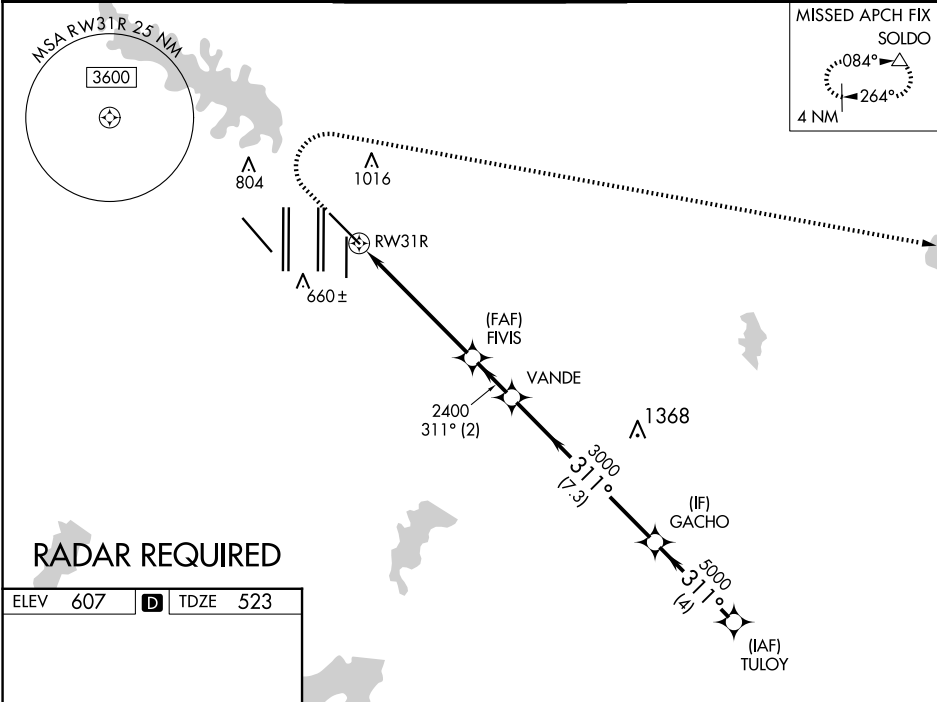

1100	3000	SOLDO	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 69).			
CATEGORY	A	B	C	D		
RNP 0.14 DA		838/27	315 (300-5%)			
RNP 0.23 DA		928/44	405 (400-7%)			
RNP 0.30 DA		987/55	464 (400-1)			
AUTHORIZATION REQUIRED						

AUTHORIZATION REQUIRED