


Rwy Idg	5102
TDZE	3254
Apt Elev	3279

RNAV (GPS) RWY 26
SEARLE FLD (OGA)

T When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cots visibility $\frac{1}{8}$ SM, LNAV/VNAV all Cots and Circling Cat B visibility $\frac{1}{4}$ SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For uncompatibilized Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.



MISSED APPROACH:
Climb to 5300 direct
AHUFU and hold.

AWOS-3
121.275

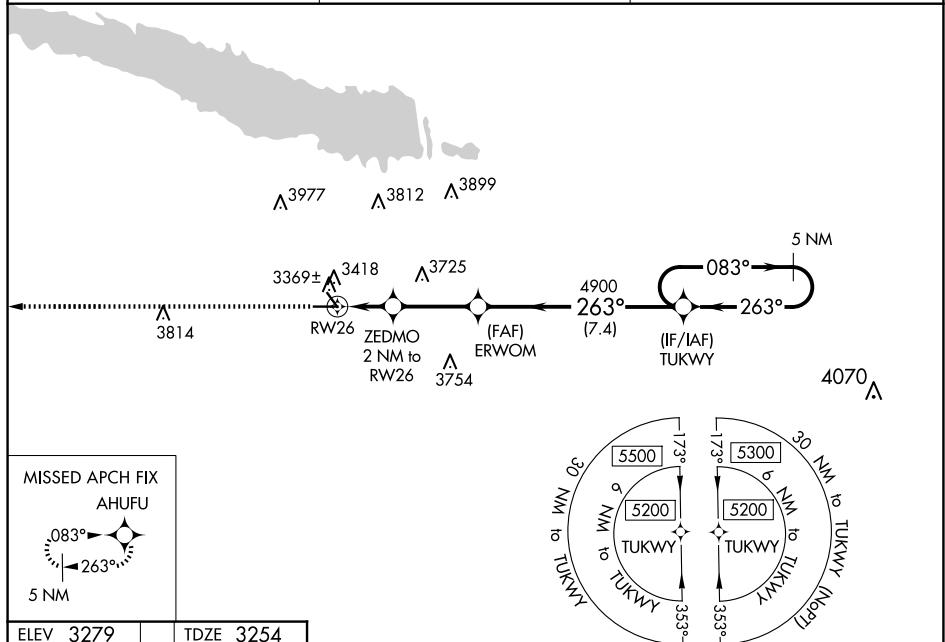DENVER CENTER
132.7 397.85UNICOM
122.8 (CTAF) **L**

ELEV 3279

TDZE 3254

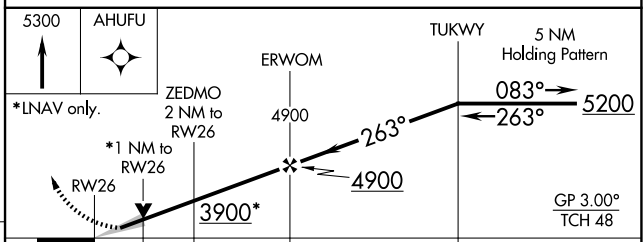

CATEGORY		A	B	C	D
LPV	DA	3504-1	250 (300-1)		NA
LNAV/ VNAV	DA	3540-1	286 (300-1)		NA
LNAV	MDA	3620-1	366 (400-1)		NA
CIRCLING		3940-1 661 (700-1)	4000-1 721 (800-1)		NA

RNAV (GPS) RWY 26

NC-2, 22 JAN 2026 to 19 FEB 2026