

WAAS CH 82435 W13A	APP CRS 128°	Rwy Idg 6503 TDZE 658 Apt Elev 658
--	------------------------	---

RNAV (GPS) RWY 13

NEW BRAUNFELS NTL (BAZ)

RNP APCH


T When local altimeter setting not received, use San Marcos Rgnl altimeter setting; increase LPV DA to 951 feet, LNAV/VNAV DA to 1169 feet; increase all MDAs 60 feet and visibility. LNAV and Circling Cat C/D ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using San Marcos altimeter setting. For inop ALS, increase LNAV/VNAV visibility to 1 ½ SM. Inop table does not apply to LPV all Cats and LNAV Cats A/B. For inop ALS when using San Marcos Rgnl altimeter setting, increase LPV all Cats visibility to ½ SM and LNAV/VNAV all Cats visibility to 1 ½ SM. When using San Marcos Rgnl altimeter setting, inop table does not apply to LNAV Cats A/B.

MALS




MISSED APPROACH:
Climb to 3500 direct
NUMMO and hold,
continue climb-in-hold
to 3500.

ATIS 119.325	SAN ANTONIO APP CON 124.45 335.625	NEW BRAUNFELS TOWER★ 127.05 (CTAF) 0 285.4	GND CON 120.175	CLNC DEL 134.75	CLNC DEL 134.75 (When twr closed)	UNICOM 122.7
-----------------	---------------------------------------	---	--------------------	--------------------	---	-----------------

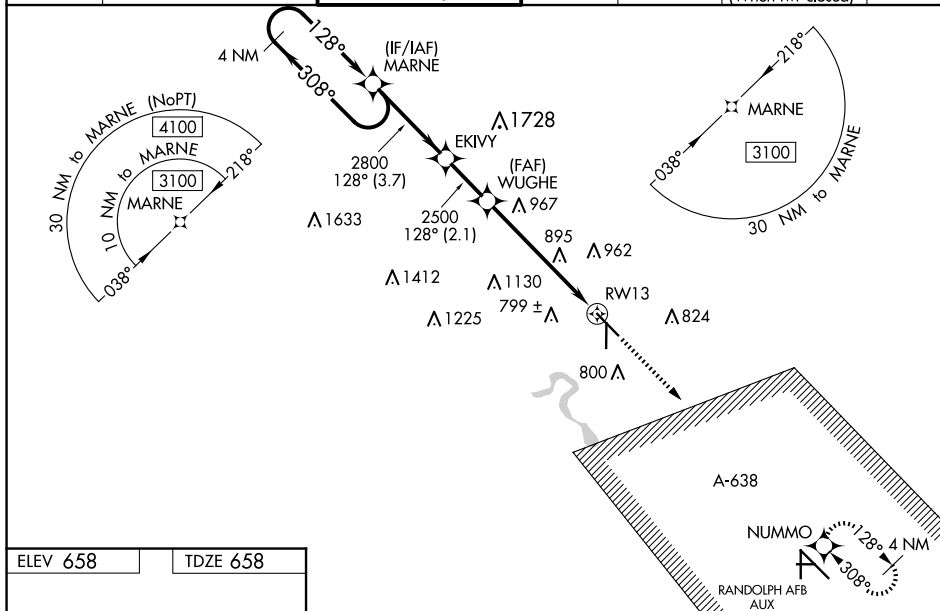

ELEV 658		TDZE 658
----------	--	----------

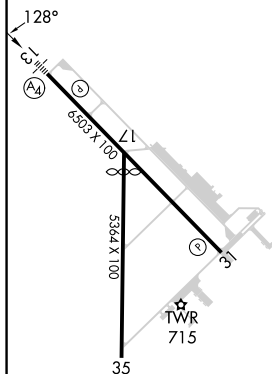


REIL Rwy 13

MIRL Rwy 13-31 and 17-35 **L**

NEW BRAUNFELS, TEXAS

Amdt 1A 08NOV18

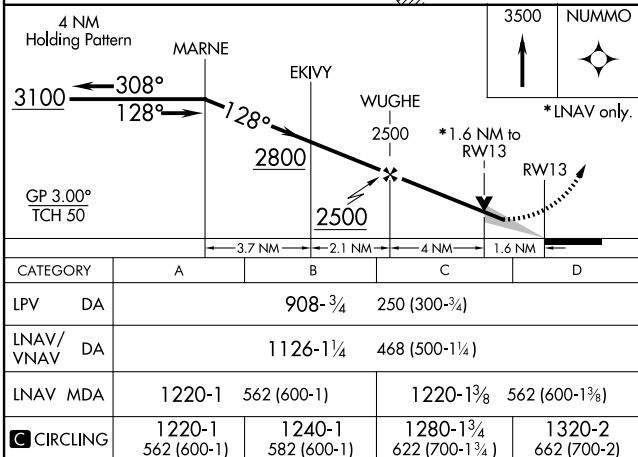

NEW BRAUNFELS NTL (BAZ)

RNAV (GPS) RWY 13

29°42'N-98°02'W

SC-3, 22 JAN 2026 to 19 FEB 2026