


BOBZY FIVE DEPARTURE (RNAV)

CHARLOTTE DEP CON	
120.05	257.2
ASOS	
135.725	
CINC DEL	
127.2	
UNICOM	
123.0	

RNAV 1-DME/DME/IRU or GPS.
RADAR required.

TAKEOFF MINIMUMS
Rwys 3, 21: Standard.

TOP ALTITUDE:
3000

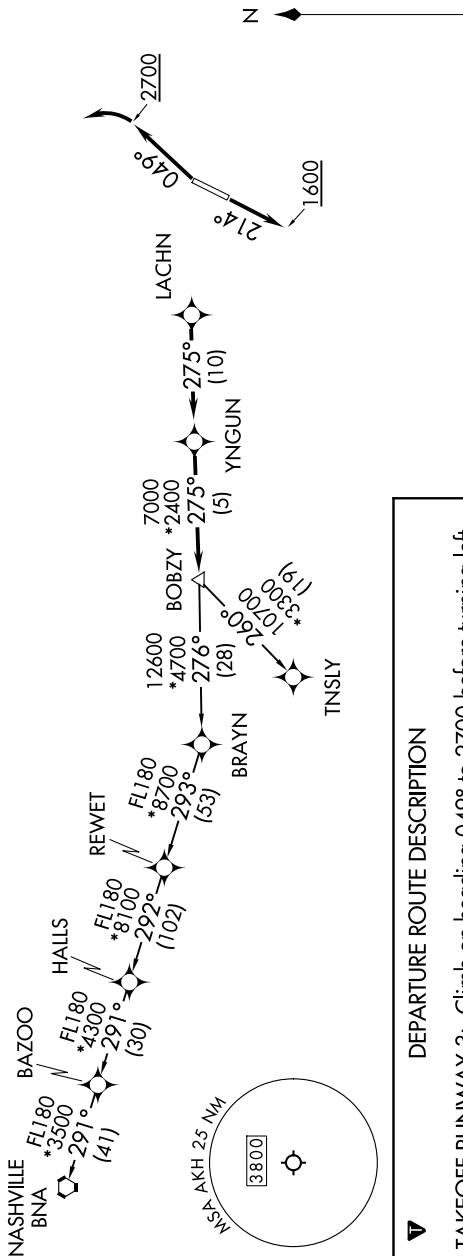

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 3: Climb on heading 049° to 2700 before turning left, then on heading assigned by ATC, thence. . . .

TAKEOFF RUNWAY 21: Climb on heading 214° to 1600 before proceeding north, then on heading assigned by ATC, thence. . . .

..... on RADAR vectors to LACHN, then on depicted route to BOBY, then on assigned transition. Maintain 3000, expect clearance to filed altitude within 10 minutes after departure.

NASHVILLE TRANSITION (BOBZY5.BNA)
TNSLY TRANSITION (BOBZY5.TNSLY)

NOTE: For turbo jets only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Transponder code will be issued via PDC or Charlotte CLNC DEL.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K; if unable advise ATC.

NOTE: Chart not to scale.