


▼

▲NA

Baro-VNAV NA. Circling Rwy 13, 31 NA at night. Rwy 20 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Use Lubbock altimeter setting, when not received, use Seminole altimeter setting and increase LPV DA to 3609 feet; increase LNAV/VNAV DA to 3629 feet; increase all MDA 20 feet and LNAV Cat C/D visibility ⅛ SM.

MISSED APPROACH: Climb to 5200 direct WOGFE and hold.

LBB ASOS 125.3 270.275	LUBBOCK APP CON 119.2 351.8	UNICOM 122.8 (CTAF) 0
---------------------------	--------------------------------	--------------------------

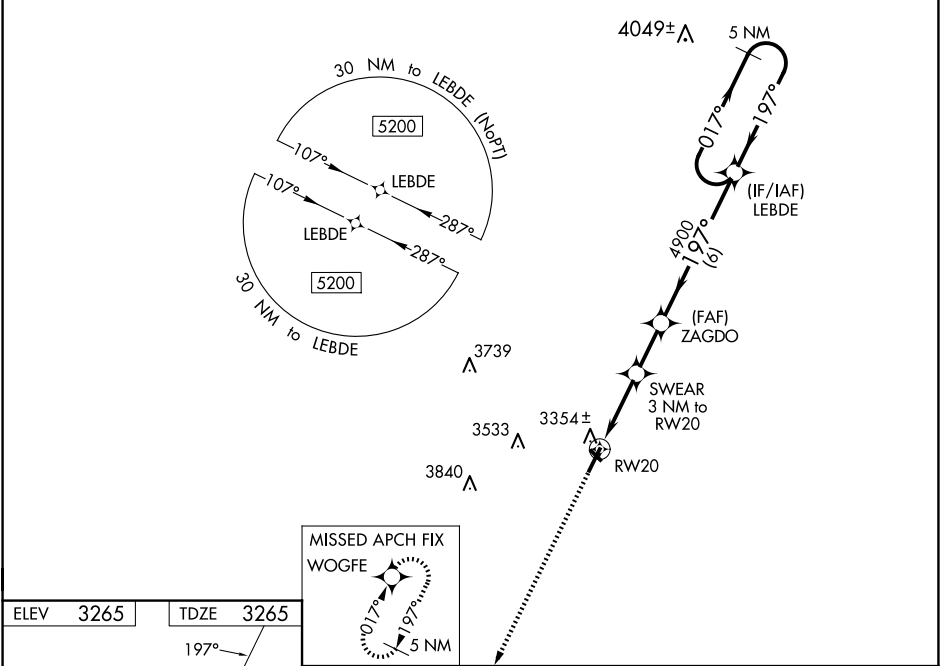

ELEV 3265	TDZE 3265
197°	20
27.65 X 75	0.45 UP
5218 X 75	2
MIRL Rwy 2-20 0	
5200 WOGFE	5200
*LNAV only.	SWEAR 3 NM to RW20
ZAGDO	4900
LEBDE	5 NM Holding Pattern
017°	017°
197°	197°
4900	4900
3 NM	2 NM
6 NM	
GP 3.00°	TCH 41
CATEGORY	A
LPV DA	3598-1
LNAV/VNAV DA	3618-1
LNAV MDA	3700-1
CIRCLING	3760-1
495 (500-1)	3920-1
655 (700-1)	3980-2
715 (800-2)	4100-2¾
835 (900-2¾)	