

WAAS CH 99725 W34A	APP CRS 335°	Rwy Ldg TDZE 665 Apt Elev 689
--	------------------------	---

RNAV (GPS) RWY 34

ABERNATHY FLD (GZS)

RNP APCH - GPS.



▼

▲ NA

Baro-VNAV NA when using MDQ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 34 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use MDQ altimeter setting: increase LPV DA to 996 feet; increase LNAV/VNAV DA to 1524 feet and all visibilities 1½ SM; increase all MDAs 100 feet and LNAV visibility Cat B ¼ SM, Cats C and D ½ SM, and Circling visibility Cats A and B ¼ SM and Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct WOZYE and hold.

AWOS-3 118.275	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

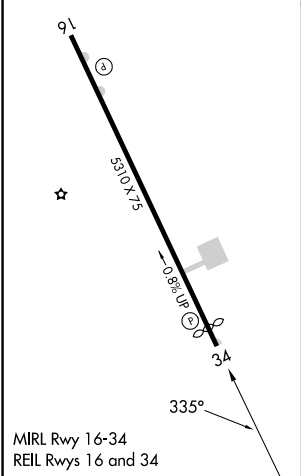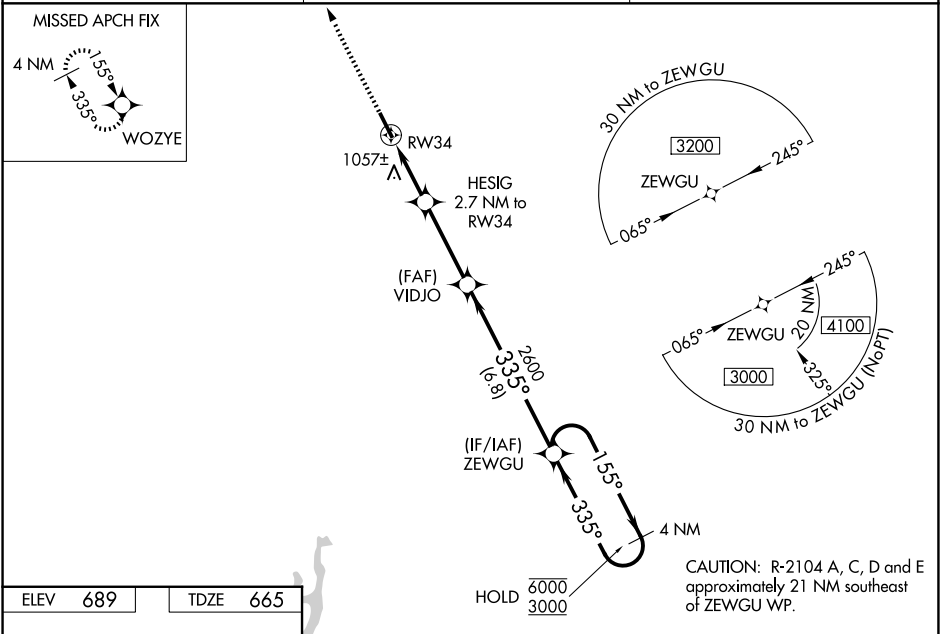

CATEGORY	A	B	C	D
LPV DA	915-1 250 (300-1)			
LNAV/VNAV DA	1443-2½ 778 (800-2½)			
LNAV MDA	1320-1 655 (700-1)	1320-1⅞ 655 (700-1⅞)		
CIRCLING	1420-1 731 (800-1)	1480-1 791 (800-1)	1480-2¼ 791 (800-2¼)	1640-3 951 (1000-3)