


WAAS CH 42547 W29A	APP CRS 294°	Rwy Ldg TDZE Apt Elev	5003 196 196
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29

SWINTON SMITH FLD AT REIDSVILLE MUNI (RVJ)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3000 direct FEVNA and hold, continue climb-in-hold to 3000.
RADAR required for procedure entry when R-3005 A/B/C/E active.	
▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Hold-in-lieu NA when R-3005 A/B/C/E active.	

AWOS-3PT 128.325	JACKSONVILLE CENTER 127.575 269.025	CTAF 122.9
----------------------------	---	----------------------

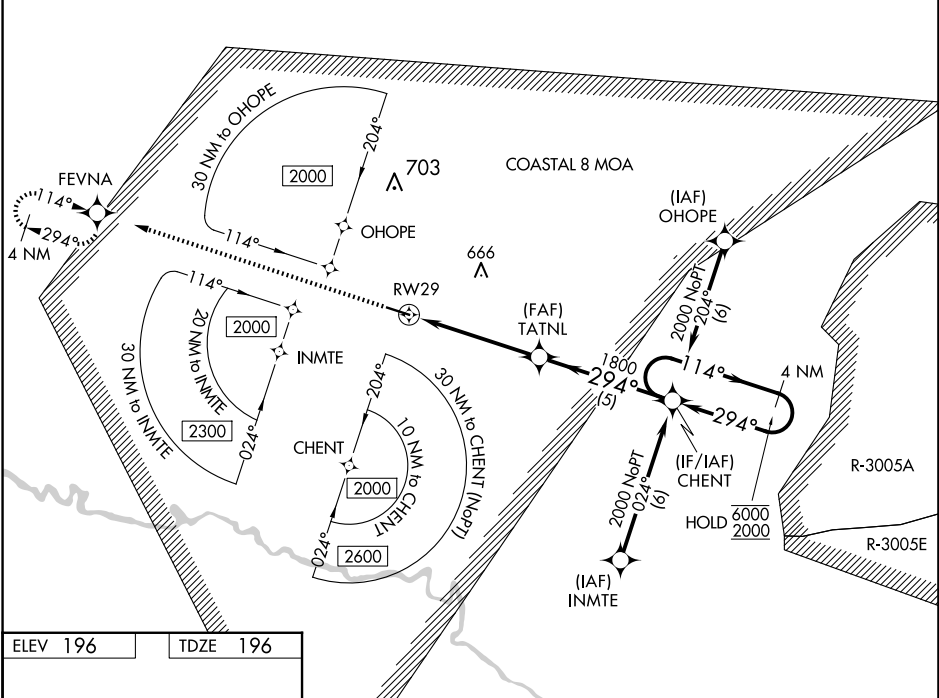

ELEV 196	TDZE 196
-----------------	-----------------

3000

FEVNA

1.4 NM to RW29

RW29

1800

TATNL

CHENT

Holding Pattern

114°

294°

6000

2000

GP 3.00°

TCH 45

CATEGORY	A	B	C	D
LPV DA		446-¾	250 (300-¾)	
LNAV/VNAV DA		584-1⅛	388 (400-1⅛)	
LNAV MDA	660-1	464 (500-1)	660-1⅓	464 (500-1⅓)
CIRCLING	660-1	464 (500-1)	860-1¾ 664 (700-1¾)	1020-2¾ 824 (900-2¾)