

VORTAC MSN	APP CRS	Rwy Ldg	4001
108.6	254°	TDZE	928
Chan 23		Apt Elev	928

VOR RWY 28


MIDDLETON MUNI/MOREY FLD (C29)

⚠

When local altimeter setting not received, use Dane County Rgnl/Truax Fld altimeter setting and increase all MDAs 40 feet and S-28 visibility Cat C ⅓ SM, and Circling visibility Cat C ¼ SM. RADAR or DME required. Circling NA to Rwy 1 and 19. Rwy 28 helicopter visibility reduction below 1 SM NA. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night.

MISSED APPROACH: Climb to 2000 then climbing right turn to 3500 on heading 020° and MSN R-282 to IMMES INT/9.2 DME and hold.

AWOS-3 118.675	MADISON APP CON★ 135.45 343.7	UNICOM 123.0 (CTAF) 0
-------------------	----------------------------------	--------------------------

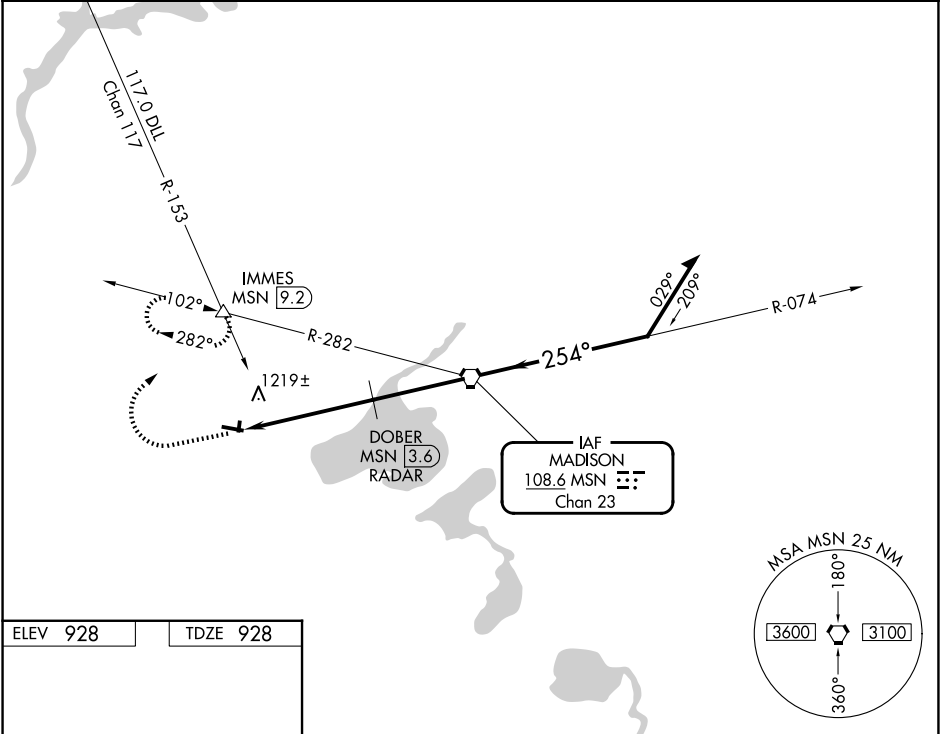

ELEV 928

TDZE 928

MIRL Rwy 10-28 0

REIL Rwys 10 and 28 0

FAF to MAP 8.4 NM

Knots	60	90	120	150	180
Min:Sec	8:24	5:36	4:12	3:22	2:48

	2000	3500	MSN R-282	IMMES	VGSI and descent angles not coincident (VGSI Angle 4.00°/TCH 36°).
	↑	hdg 020°		△	
					MSN VORTAC
					Remain within 10 NM
					074°
					3500
					254°
					3500
					3.00°
					TCH 36
					4.8 NM
					3.6 NM
CATEGORY	A	B	C	D	
S-28	1500-1	572 (600-1)	1500-1½ 572 (600-1½)	NA	
CIRCLING	1560-1 632 (700-1)	1640-1 712 (800-1)	1660-2 732 (800-2)	NA	

EC-3, 22 JAN 2026 to 19 FEB 2026

EC-3, 22 JAN 2026 to 19 FEB 2026