

WAAS CH 99707 W36A	APP CRS 005°	Rwy Idg 5003 TDZE 979 Apt Elev 979
--	------------------------	---



RNAV (GPS) RWY 36
WINCHESTER MUNI (BGF)

RNP APCH - GPS.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C. When local altimeter setting not received, use Chattahoochee altimeter setting: increase LPV DA to 1483 feet and all visibilities $\frac{3}{4}$ SM; increase LNAV/VNAV DA to 1510 feet and all visibilities $\frac{3}{4}$ SM; increase all MDAs 160 feet and LNAV visibility Cat C $\frac{3}{4}$ SM and Circling Cat B/C $\frac{1}{2}$ SM. Baro-VNAV and VDP NA when using Chattahoochee altimeter setting. Rwy 36 helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 4000 direct
ZEDUX and hold.

AWOS-3 121.675	MEMPHIS CENTER 128.15 323.125	GCO 121.725	UNICOM 122.8 (CTAF)
--------------------------	---	-----------------------	-------------------------------

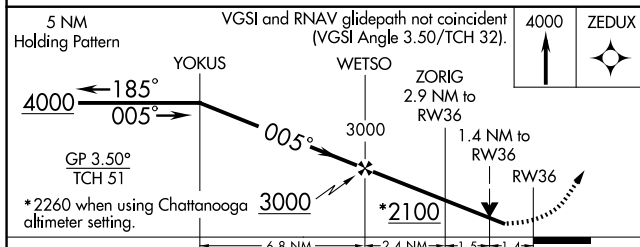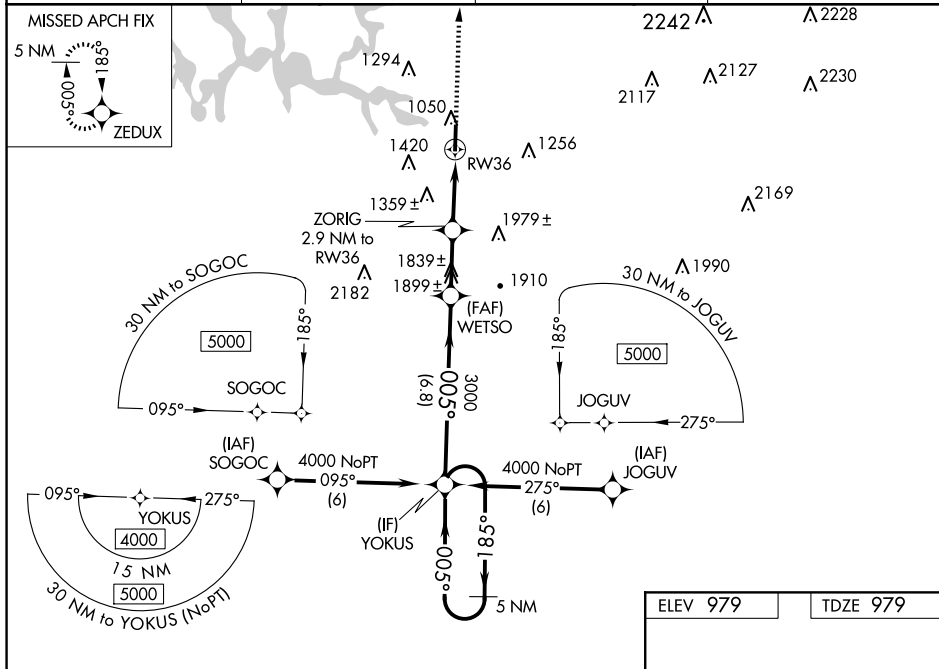

CATEGORY	A	B	C	D
LPV DA	1340-1	361 (400-1)		NA
RNAV/DA	1367-1½	388 (400-1½)		NA
RNAV MDA	1540-1	561 (600-1)	1540-1½ 561 (600-1½)	NA
CIRCLING	1540-1 561 (600-1)	1780-1 801 (900-1)	1820-2½ 841 (900-2½)	NA

