

WAAS CH 99317 W34A	APP CRS 340°	Rwy Idg 5000 TDZE 1257 Apt Elev 1266
--	------------------------	---



RNAV (GPS) RWY 34
GWINNER/ROGER MELROE FLD (GWR)

⚠ Circling NA to Rwys 6 and 24. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Fargo altimeter setting: increase all DA to 1683 feet and all visibilities ½ SM; increase all MDAs 180 feet and visibility LNAV Cat C/D ½ SM, and Circling Cat C ½ SM, and Circling Cat D ½ SM. Baro-VNAV and VDP NA when using Fargo altimeter setting.


MISSED APPROACH:
Climb to 3500 direct
FILON and hold.

AWOS-3 118.325	MINNEAPOLIS CENTER 127.35 278.3	UNICOM 122.7 (CTAF) 1
--------------------------	---	--

MISSED APCH FIX

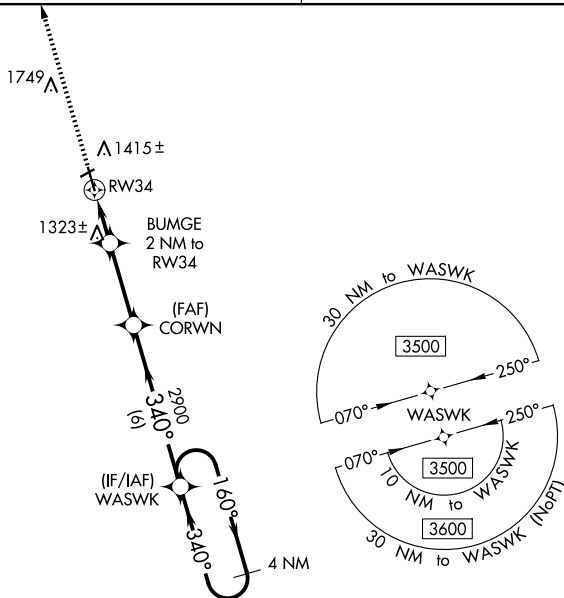

ELEV	1266		TDZE	1257
------	------	--	------	------

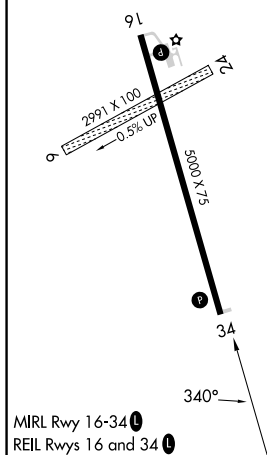

*RNAV only. BUMGE 2 NM to RW34 *0.9 NM to RW34 *1920 2900 340° 160° 3500 GP 3.00° TCH 40	
CATEGORY	A B C D
LPV DA	1507-1 250 (300-1)
RNAV/ VNAV DA	1507-1 250 (300-1)
RNAV MDA	1580-1 323 (400-1)
CIRCLING	1780-1 514 (600-1) 1840-1½ 574 (600-1½) 2060-2½ 794 (800-2½)