CAMP MACKALL, NORTH CAROLINA

RNAV (GPS) RWY 30

MACKALL AAF (KHFF)

WAAS CH 51219 W30A	APCH CRS 298°	Rwy ldg 4794 TDZE 352 Arpt Elev 376

(USA)

RNP APCH - GPS

RADAR required when special use space active.

T * When tower closed, increase vis to 1 mile.
** Circling NA to RWYs 4,16,22, and 34.

MISSED APPROACH: Climb to 2400 direct AAMMO and hold.

D-ATIS	FAYETTEVILLE APP CON/DEP CON	TOWER*	GND CON
141.4	127.8 343.725	121.0 (CTAF) 254.4	128.35 251.05

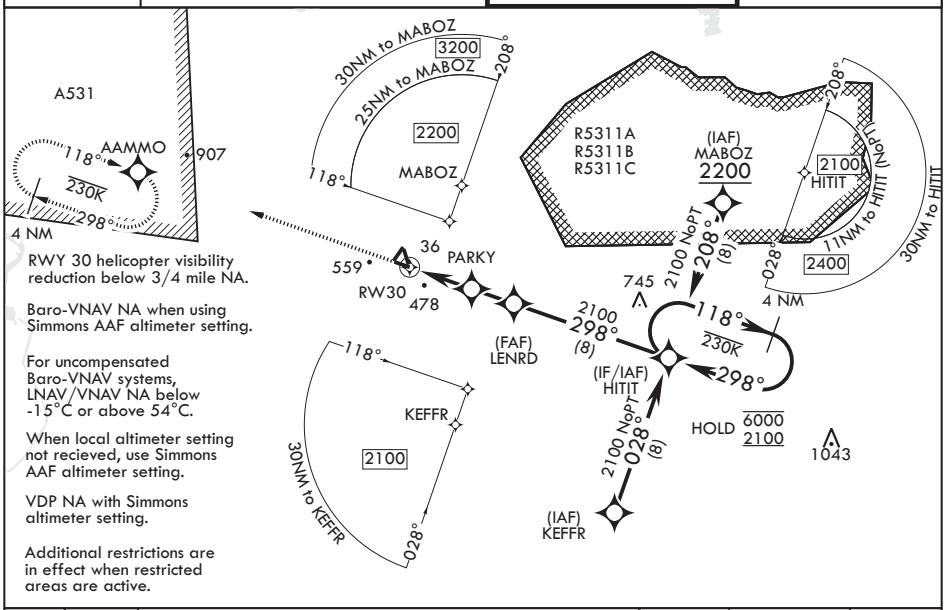

RWY 30 helicopter visibility reduction below 3/4 mile NA.

Baro-VNAV NA when using Simmons AAF altimeter setting.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

When local altimeter setting not recieved, use Simmons AAF altimeter setting.

VDP NA with Simmons altimeter setting.

Additional restrictions are in effect when restricted areas are active.

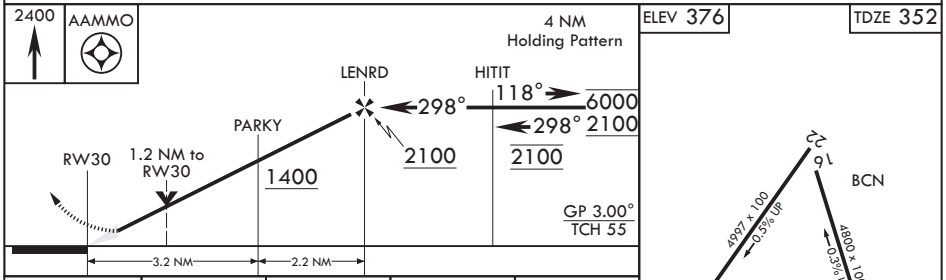

CATEGORY	A	B	C	D
LPV DA*	602-¾ 250 (300-¾)			
LNAV/VNAV DA	793-1⅜ 441 (500-1⅜)			
LNAV MDA	760-1 408 (400-1)		760-1⅛ 408 (400-1⅛)	
CIRCLING**	860-1 484 (500-1)	880-1 504 (600-1)	980-1¾ 604 (700-1¾)	1040-2 664 (700-2)
SIMMONS AAF ALTIMETER SETTING MINIMUMS				
LPV DA	686-1 334 (400-1)			
LNAV/VNAV DA	860-1⅜ 508 (500-1⅜)			
LNAV MDA	860-1 508 (500-1)		860-1⅜ 508 (500-1⅜)	
CIRCLING**	960-1 584 (600-1)	980-1 604 (700-1)	1080-2 704 (800-2)	1140-2½ 764 (800-2½)

MIRL Rwy 12-30

SE-2, 22 JAN 2026 to 19 FEB 2026
SE-2, 22 JAN 2026 to 19 FEB 2026