



VORTAC HLI	APP CRS	Rwy Idg	N/A
112.4	094°	TDZE	N/A
Chan 71		Apt Elev	467

VOR/DME-A
RIPLEY (25M)

▼ Use Corinth altimeter setting; when not received, use Tupelo altimeter setting and increase all MDAs 40 feet, and visibility Cat C ¼ SM. ▲ NA Procedure NA at night. Helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climbing left turn to 3000 via heading 251° and HLI VORTAC R-094 to HLI VORTAC and hold.
---	--

CRX AWOS-3PT 118.675	MEMPHIS CENTER 135.9 260.6	UNICOM 122.8 (CTAF) 0
-------------------------	-------------------------------	--------------------------

Procedure NA for arrivals on HLI VORTAC
airway radials 045 CW 112.

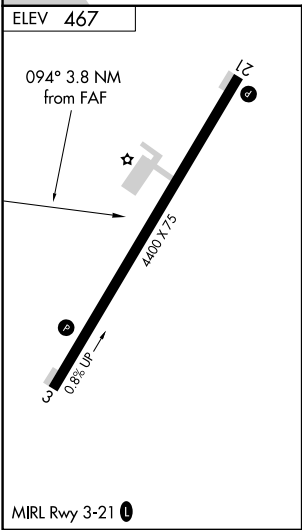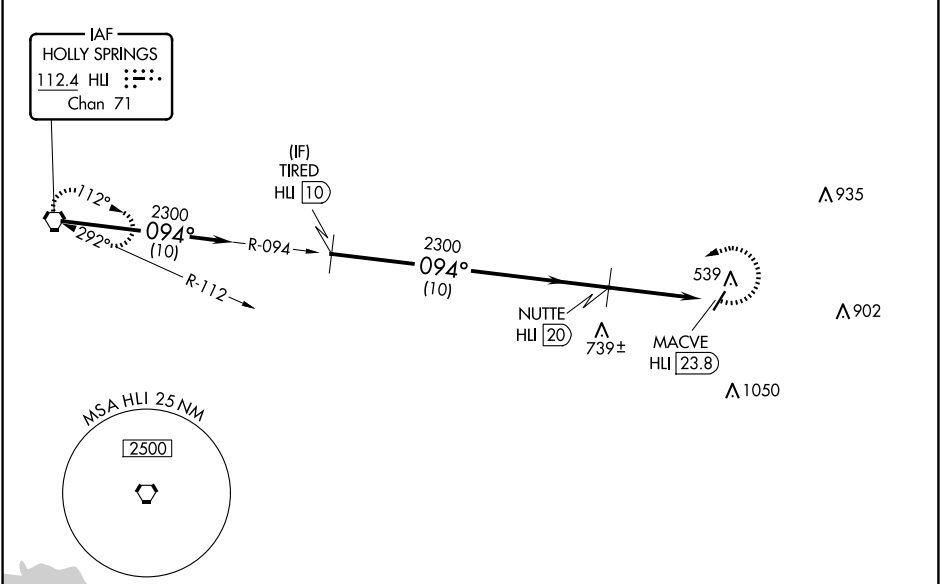

	3000	hdg 251° HLI R-094	HLI
			0
	HLI VORTAC	TIRED HLI 10	NUTTE HLI 20
	2300	2300	2300
	094°	094°	094°
	2300	2300	MACVE HLI 23.8
	10 NM	10 NM	3.8 NM
CATEGORY	A	B	C
CIRCLING	1060-1 593 (600-1)	1100-1¼ 633 (700-1¼)	1120-1¾ 653 (700-1¾)
			1420-3 953 (1000-3)