


|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>99627</b><br><b>W24A</b> | APP CRS<br><b>239°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>4600</b><br><b>425</b><br><b>428</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 24

MUHLenberg COUNTY (M21)

|                 |                                                                                                                                                                                                                                                                                       |                                                          |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|
| RNP APCH - GPS. | When local altimeter setting not received, use Owensboro altimeter setting and increase all MDAs 80 feet. Increase LP Cats C/D visibility ¾ SM and LNAV Cats C/D and Circling Cats C/D visibility ¼ SM. Procedure NA at night. Rwy 24, helicopter visibility reduction below 1 SM NA. | MISSED APPROACH:<br>Climb to 3000 direct JEPAX and hold. |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|

|                         |                                            |                                 |
|-------------------------|--------------------------------------------|---------------------------------|
| AWOS-3<br><b>120.45</b> | CAMPBELL APP CON ★<br><b>118.1 269.525</b> | UNICOM<br><b>123.0 (CTAF) 0</b> |
|-------------------------|--------------------------------------------|---------------------------------|

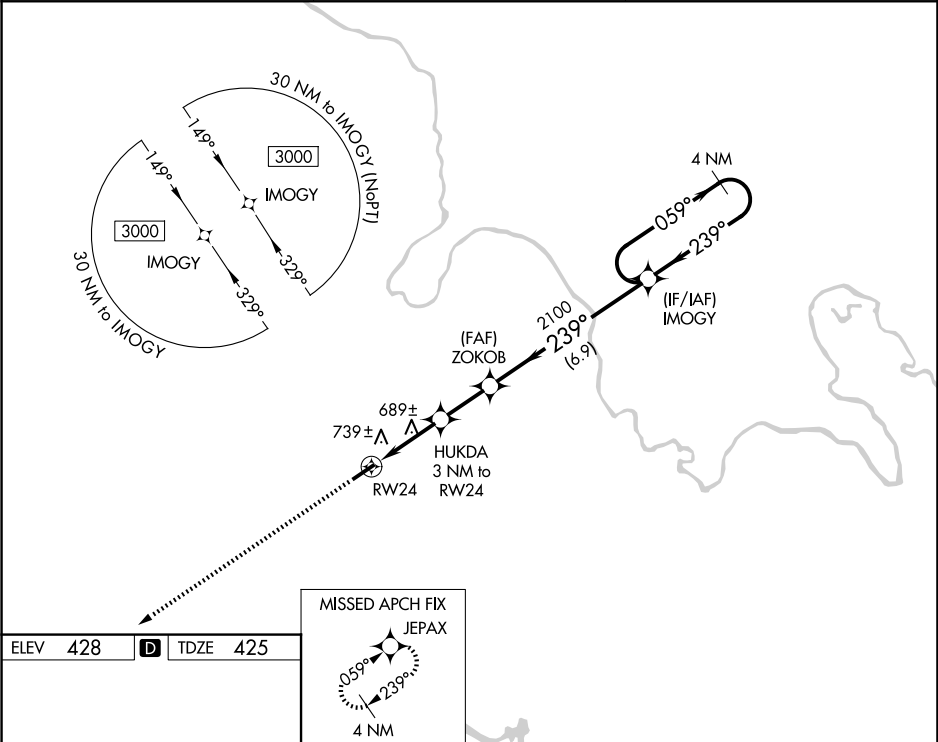

MIRL Rwy 6-24  
REIL Rws 6 and 24

| Visual Segment - Obstacles. |  |                       |                       |                         |                         |
|-----------------------------|--|-----------------------|-----------------------|-------------------------|-------------------------|
|                             |  | 4 NM Holding Pattern  |                       |                         |                         |
|                             |  | IMOGY                 |                       |                         |                         |
|                             |  | 059° → 3000<br>← 239° |                       |                         |                         |
|                             |  | 239°                  |                       |                         |                         |
|                             |  | 2100                  |                       |                         |                         |
|                             |  | 1420                  |                       |                         |                         |
|                             |  | 3 NM 2.1 NM 6.9 NM    |                       |                         |                         |
|                             |  | HUKDA 3 NM to RW24    |                       |                         |                         |
|                             |  | ZOKOB                 |                       |                         |                         |
|                             |  | JEPAX                 |                       |                         |                         |
|                             |  | 3000                  |                       |                         |                         |
| CATEGORY                    |  | A                     | B                     | C                       | D                       |
| LP MDA                      |  | 940-1                 | 515 (600-1)           | 940-1⅓                  | 515 (600-1⅓)            |
| LNAV MDA                    |  | 1000-1                | 575 (600-1)           | 1000-1⅝                 | 575 (600-1⅝)            |
| CIRCLING                    |  | 1040-1<br>612 (700-1) | 1100-1<br>672 (700-1) | 1180-2¼<br>752 (800-2¼) | 1200-2½<br>772 (800-2½) |