

WAAS CH 81836 W05A	APP CRS 054°	Rwy Idg 5500 TDZE 255 Apt Elev 270
--	------------------------	---

RNAV (GPS) RWY 5
COLUMBIA/MARION COUNTY (OR)

RNP APCH - GPS.


NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Hattiesburgh/Laurel Rgnl altimeter setting and increase all DA 66 feet and all MDA 80 feet; increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats and Circling Cat C visibilities ¼ mile, increase Circling Cat D visibility ½ mile, increase LNAV Cat C and D visibility ¾ mile. VDP and Baro-VNAV NA when using Hattiesburgh/Laurel Rgnl altimeter setting. Rwy 5 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2400 direct
NERAE and hold.


AWOS-3PT
120.675

HOUSTON CENTER
126.8 327.8

UNICOM
122.8 (CTAF) **L**

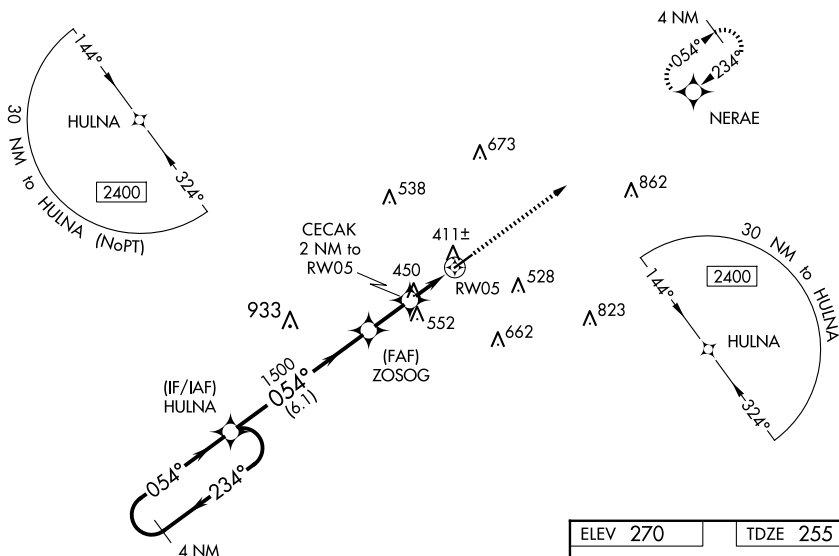

ELEV 270		TDZE 255
----------	--	----------

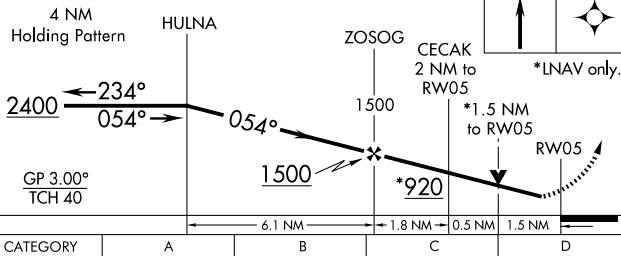

CATEGORY		A	B	C	D
LPV	DA	505-7 $\frac{7}{8}$ 250 (300-7 $\frac{7}{8}$)			
INAV/ VNAV	DA	743-1 $\frac{5}{8}$ 488 (500-1 $\frac{5}{8}$)			
INAV	MDA	760-1 505 (500-1)		760-1 $\frac{3}{8}$ 505 (500-1 $\frac{3}{8}$)	
 CIRCLING		760-1 490 (500-1)	820-1 550 (600-1)	920-1 $\frac{3}{4}$ 650 (700-1 $\frac{3}{4}$)	1000-2 $\frac{1}{4}$ 730 (800-2 $\frac{1}{4}$)

REIL Rwy 5 and 23 **L**
MIRL Rwy 5-23 **L**