


When local altimeter setting not received, use Vernal altimeter setting and increase all MDA 80 feet, FOSLA fix minimums, increase Cat C visibility ¼ SM.

MISSED APPROACH: Climbing right turn to 9000 direct MTU VOR/DME and hold, continue climb-in-hold to 9000.

AWOS-3P 118.975	SALT LAKE CENTER 135.77 257.7	UNICOM 122.8 (CTAF) 0
--------------------	----------------------------------	--------------------------

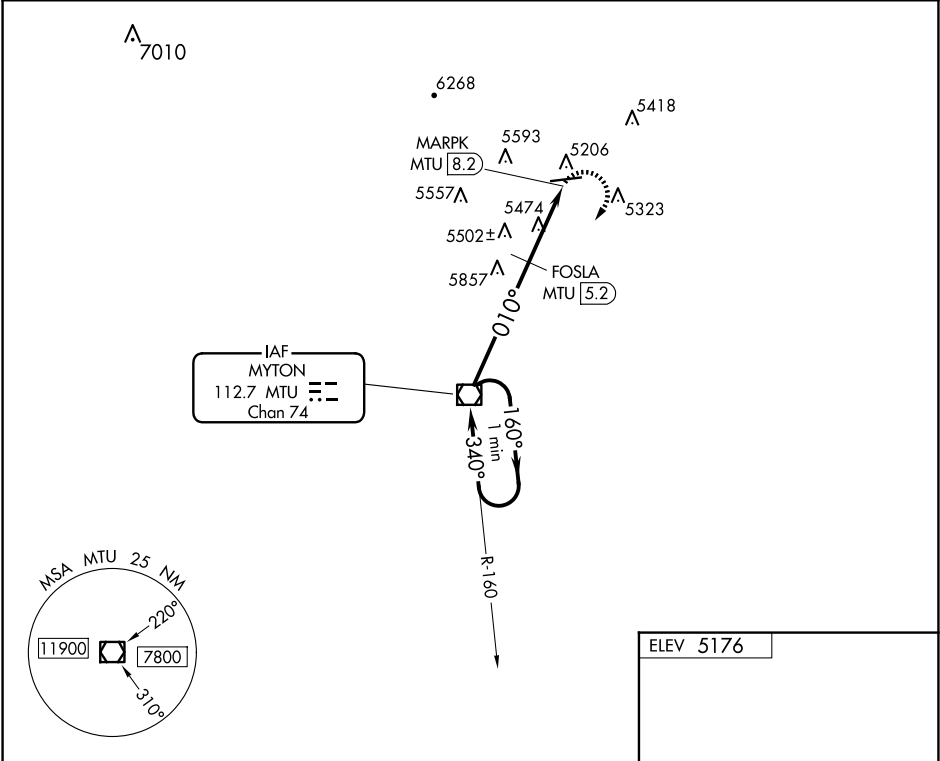

One Minute Holding Pattern				9000	MTU
8500 ← 160° → 340°					
MTU VOR/DME				FOSLA MTU 5.2	MARPK MTU 8.2
6280				010°	
5.2 NM				3 NM	
CATEGORY	A	B	C	D	
CIRCLING	6280-1¼ 1104 (1200-1¼)	6280-1½ 1104 (1200-1½)	6280-3 1104 (1200-3)	6340-3 1164 (1200-3)	
FOSLA FIX MINIMUMS					FAF to MAP 8.2 NM
CIRCLING	5760-1 584 (600-1)	5900-1 724 (800-1)	6020-2½ 844 (900-2½)	6340-3 1164 (1200-3)	Knots Min:Sec
					60 8:12
					90 5:28
					120 4:06
					150 3:17
					180 2:44