

MILFORD, IOWA

AL-6455 (FAA)

23278

VOR/DME SPW 115.15 Chan 98 (Y)	APP CRS 005°	Rwy Idg TDZE Apt Elev 1439	N/A N/A
--	------------------------	---	--------------------------


VOR-A
FULLER(4D8)

DME required. RADAR required for procedure entry.

V NA Circling NA to Rwy 18 and 36. Procedure NA at night.
Δ NA Use Spencer altimeter setting, when not received, use
Estherville altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climbing right turn to 3000 direct
SPW VOR/DME and hold.

SPW ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	CTAF 122.9
----------------------------	---	----------------------

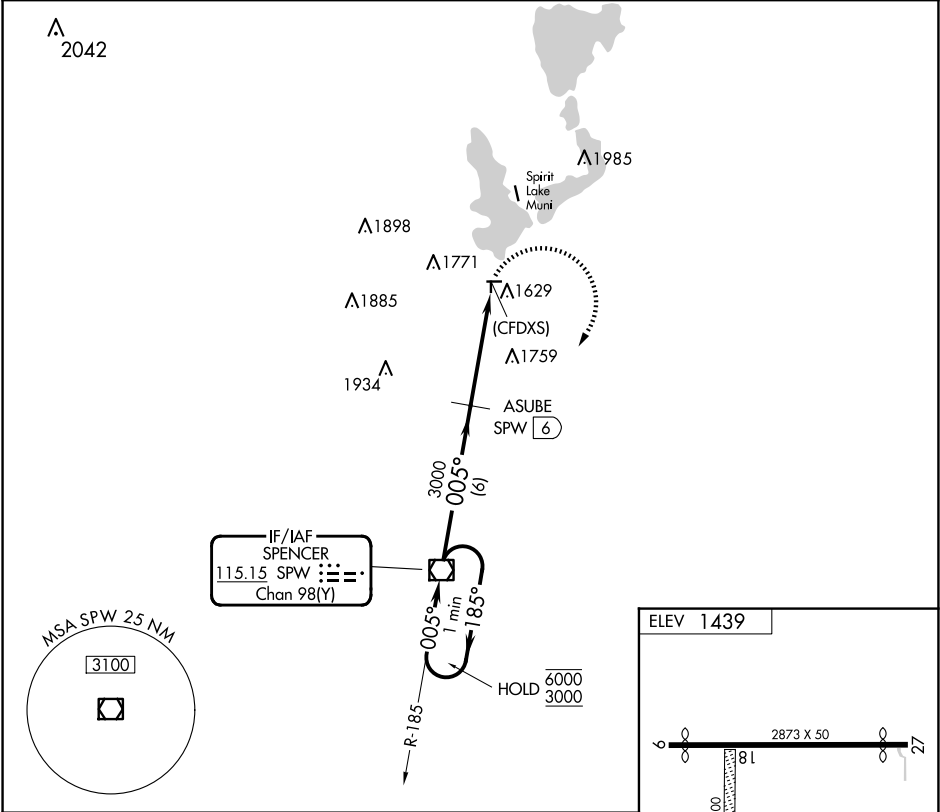

One Minute Holding Pattern		SPW VOR/DME	ASUBE SPW 6	3000	SPW
6000 ← 185° 3000 → 005°		005°	3000		
6 NM		4.4 NM			
CATEGORY	A	B	C	D	FAF to MAP 4.4 NM
C CIRCLING	2100-1	661 (700-1)	NA		Knots 60 90 120 150 180 Min:Sec 4:24 2:56 2:12 1:46 1:28

MILFORD, IOWA

43°20'N-95°10'W

Amtd 1 03JAN19

FULLER(4D8)

VOR-A

NC-3, 22 JAN 2026 to 19 FEB 2026

NC-3, 22 JAN 2026 to 19 FEB 2026