

|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>87129</b><br><b>W19A</b> | APP CRS<br><b>189°</b> | Rwy Ldg<br>TDZE <b>898</b><br>Apt Elev <b>898</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 19

WARREN COUNTY/JOHN LANE FLD (I68)

RNP APCH.

▼



NA

Rwy 19 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Dayton/Wright Brothers altimeter setting and increase all MDAs 40 feet, and LP and LNAV Cat C and D visibilities ½ SM and Circling Cat C visibility ¼ SM. Straight-in Rwy 19 and Circling Rwy 19 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH:

Climb to 3000 direct WUSPU and hold.

|                           |                                           |                          |                                   |
|---------------------------|-------------------------------------------|--------------------------|-----------------------------------|
| AWOS-3PT<br><b>120.55</b> | COLUMBUS APP CON<br><b>118.85 269.275</b> | CLNC DEL<br><b>119.4</b> | UNICOM<br><b>123.075 (CTAF) 0</b> |
|---------------------------|-------------------------------------------|--------------------------|-----------------------------------|

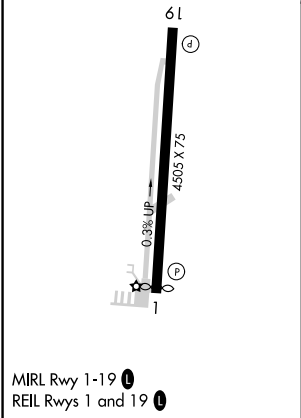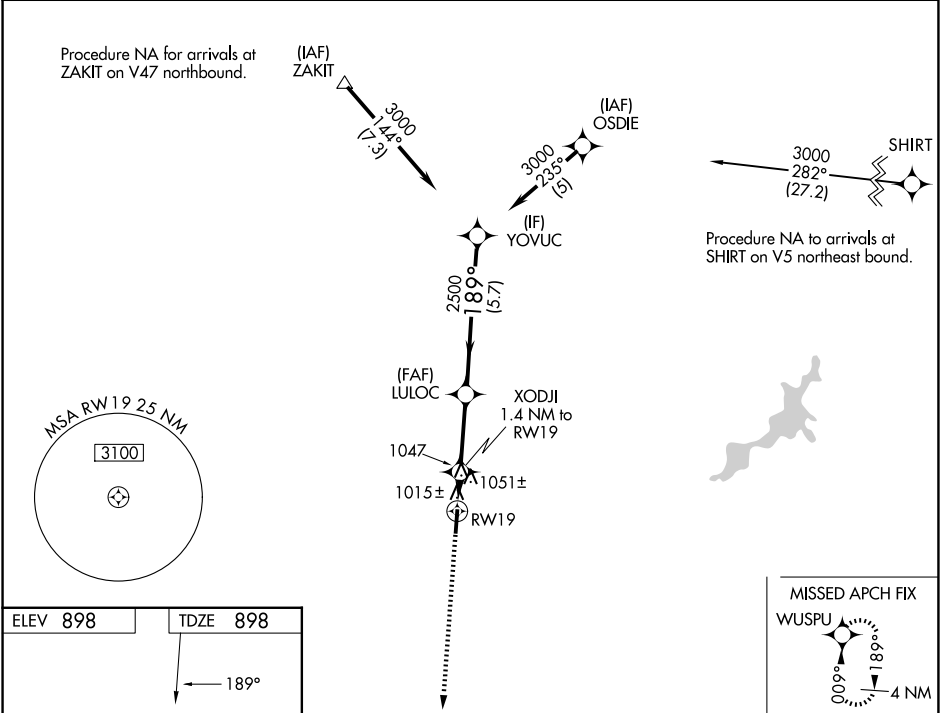

3000

WUSPU

VGSI and RNAV glidepath not coincident  
(VGSI Angle 3.50/TCH 35).

YOVUC

3000

3.50°

TCH 42

LULOC

2500

189°

XODJI 1.4 NM to RW19

1460

1.4 NM

2.8 NM

5.7 NM

RW19

|          |                       |                       |                           |                       |
|----------|-----------------------|-----------------------|---------------------------|-----------------------|
| CATEGORY | A                     | B                     | C                         | D                     |
| LP MDA   | 1280-1                | 382 (400-1)           | 1280-1 ⅛                  | 382 (400-1 ⅛)         |
| LNAV MDA | 1320-1                | 422 (500-1)           | 1320-1 ¼                  | 422 (500-1 ¼)         |
| CIRCLING | 1400-1<br>502 (600-1) | 1480-1<br>582 (600-1) | 1480-1 ½<br>582 (600-1 ½) | 1480-2<br>582 (600-2) |

EC-2, 22 JAN 2026 to 19 FEB 2026

EC-2, 22 JAN 2026 to 19 FEB 2026