

WAAS CH 45722 W11A	APP CRS 110°	Rwy Ldg TDZE 854 Apt Elev 871
--	------------------------	---

RNAV (GPS) RWY 11

LEBANON SPRINGFIELD/GEORGE HOERTER FLD (6I2)

RNP APCH.

▼


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

▲

When local altimeter setting not received, use Danville altimeter setting and increase all DA 74 feet and all MDA 80 feet. Increase LPV, LNAV/VNAV, and Circling Cat D visibility ¼ mile and LNAV Cats C/D ⅜ mile. Baro-VNAV NA when using Danville altimeter setting.

MISSED APPROACH: Climb to 4000 direct WOBIL and hold, continue climb-in-hold to 4000.

AWOS-3P 119.725	LOUISVILLE APP CON 132.075 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

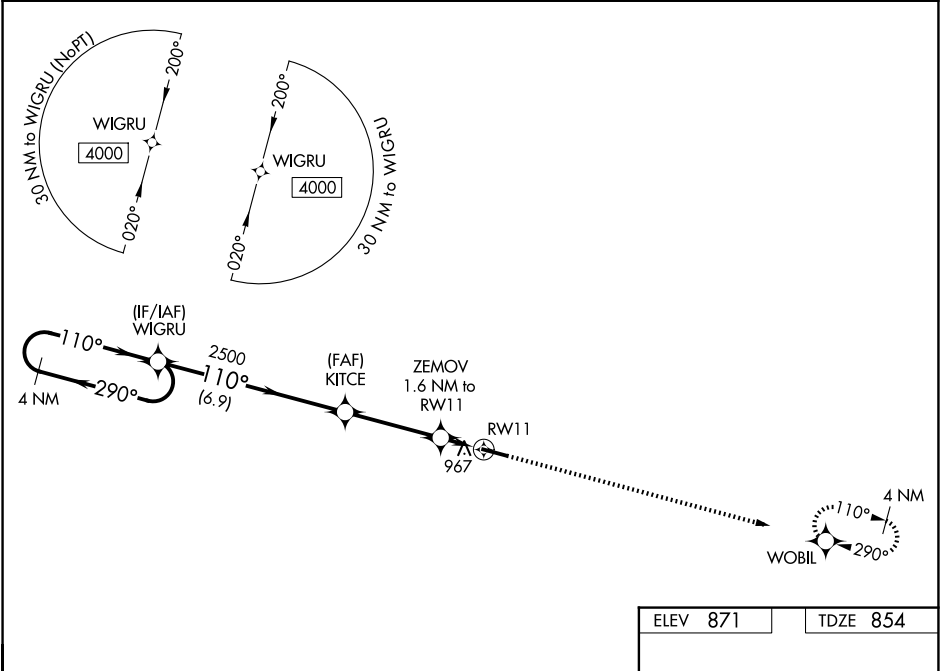

4 NM

Holding Pattern

WIGRU

4000

←290°

110°→

GP 3.00°

TCH 36

4000

↑

WOBIL

✧

*LNAV only

KITCE

2500

ZEMOV

1.6 NM to RW11

RW11

2500

1360

6.9 NM

3.6 NM

1.6 NM

110°

110°

1.0% UP

5001 X 75

29

CATEGORY	A	B	C	D
LPV DA	1104-1		250 (300-1)	
LNAV/VNAV DA	1159-1⅛		305 (300-1⅛)	
LNAV MDA	1220-1		366 (400-1)	
CIRCLING	1320-1 449 (500-1)	1340-1 469 (500-1)	1360-1½ 489 (500-1½)	1500-2 629 (700-2)

MRL Rwy 11-29

REIL Rws 11 and 29

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026