

WAAS CH 72647 W35A	APP CRS 353°	Rwy Ldg TDZE 1547 Apt Elev 1551
--	------------------------	---

RNAV (GPS) RWY 35

WATONGA RGNL (JWG)



RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Baro-VNAV and VDP NA when using CLK altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use CLK altimeter setting and increase LPV DA to 1903 feet and all visibilities ½ SM. Increase LNAV/VNAV DA to 2186 feet and all visibilities ½ SM. Increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ⅔ SM.

MISSED APPROACH: Climb to 4000 direct ASEHU and hold.

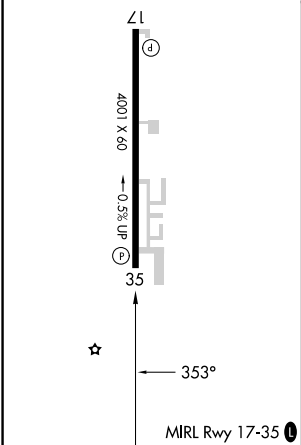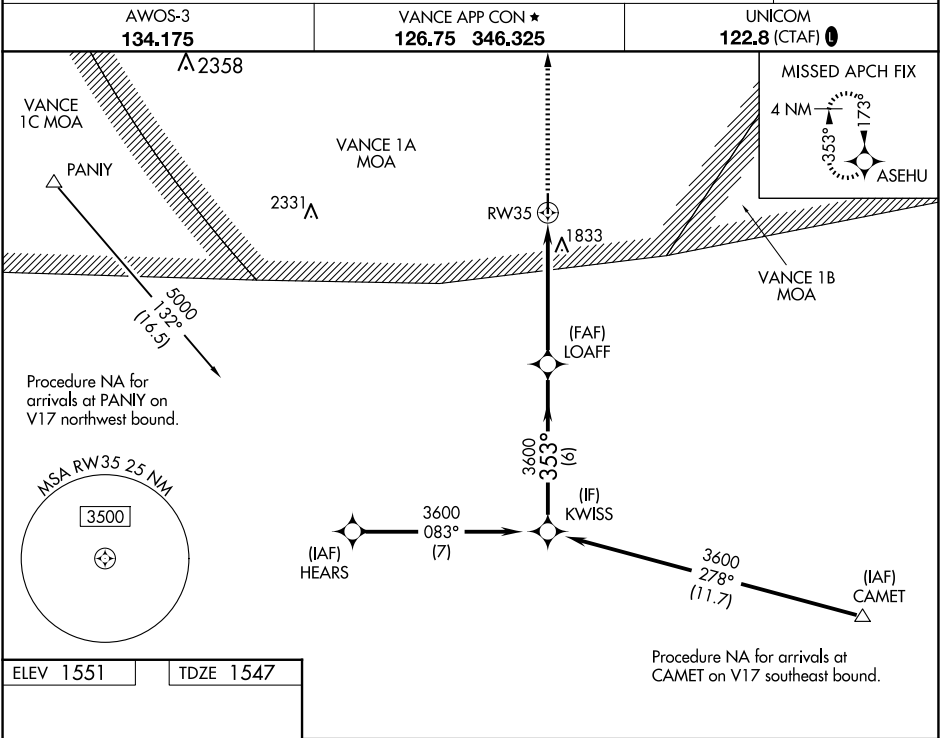

4000 ASEHU

LOAFF

3600

KWISS

353°

3600

1.4 NM to RW35

RW35

1.4 NM

4 NM

6 NM

GP 3.50°
TCH 46

CATEGORY	A	B	C	D
LPV DA	1817-7 ⁸ / ₈	270 (300-7 ⁸ / ₈)		NA
LNAV/ VNAV DA	2100-1 ⁵ / ₈	553 (600-1 ⁵ / ₈)		NA
LNAV MDA	2100-1	553 (600-1)	2100-1 ⁵ / ₈ 553 (600-1 ⁵ / ₈)	NA
CIRCLING	2100-1 549 (600-1)	2140-1 589 (600-1)	2140-1 ⁵ / ₈ 589 (600-1 ⁵ / ₈)	NA