

WAAS CH 42839 W03A	APP CRS 030°	Rwy Ldg 8500 TDZE 954 Apt Elev 969
--	------------------------	---



RNAV (GPS) RWY 3
PHOENIX GOODYEAR (GYR)

RNP APCH


T Procedure NA at night. Helicopter visibility reduction below $\frac{3}{4}$ SM NA. VDP NA
A NA when using Phoenix Sky Harbor Intl altimeter setting. When local altimeter setting
not received, use Phoenix Sky Harbor Intl altimeter setting: increase all MDA 80
feet and visibility LP/LNAV Cat C/D and Circling Cat C $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct TATUY and hold.

ATIS 118.35	LUKE APP CON ★ 125.45 263.125	GOODYEAR TOWER ★ 120.1 (CTAF) 239.3	GND CON 121.7	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

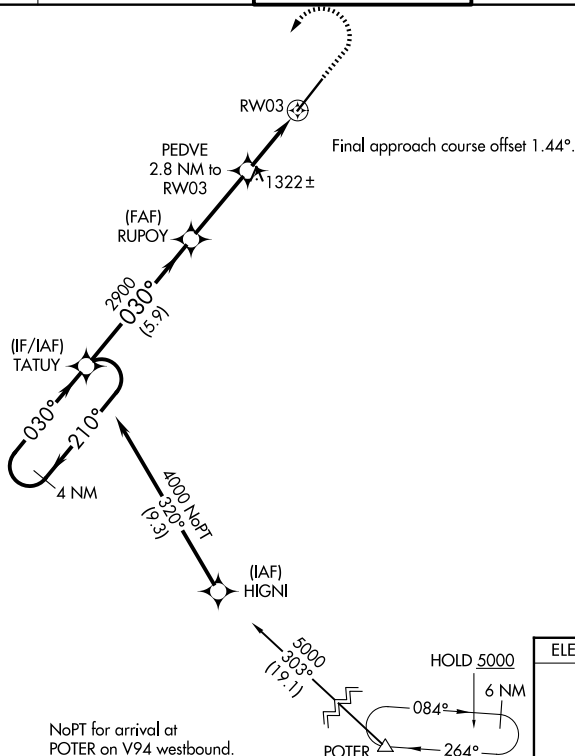

ELEV	969		TDZE	954
------	-----	--	------	-----

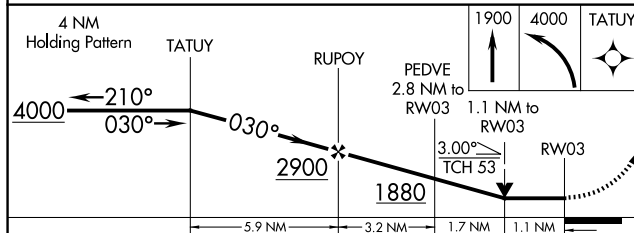

CATEGORY	A	B	C	D
LP MDA	1340-1	386 (400-1)	1340-1 $\frac{1}{8}$	386 (400-1 $\frac{1}{8}$)
LNAV MDA	1580-1	626 (700-1)	1580-1 $\frac{3}{4}$	626 (700-1 $\frac{3}{4}$)
CIRCLING	1580-1	611 (700-1)	1860-2 $\frac{3}{4}$ 891 (900-2 $\frac{3}{4}$)	1920-3 951 (1000-3)

