

WAAS CH 57917 W01A	APP CRS 008°	Rwy Idg 5000 TDZE 969 Apt Elev 969
--	------------------------	---

RNAV (GPS) RWY 1
LAFAYETTE MUNI (3M7)

RNP APCH - GPS.



▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Obtain local altimeter setting on CTAF; when not received, use Bowling Green altimeter setting: increase LPV DA to 1441 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1585 feet and all visibilities ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C and D ¼ SM and Circling Cat C and D ½ SM. VDP and Baro-VNAV NA when using Bowling Green altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
OZESI and hold.

NASHVILLE APP CON 118.4 360.7	UNICOM 122.8 (CTAF) 0
---	---------------------------------

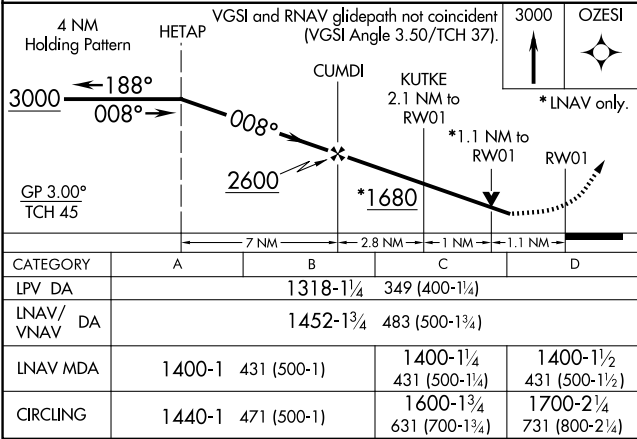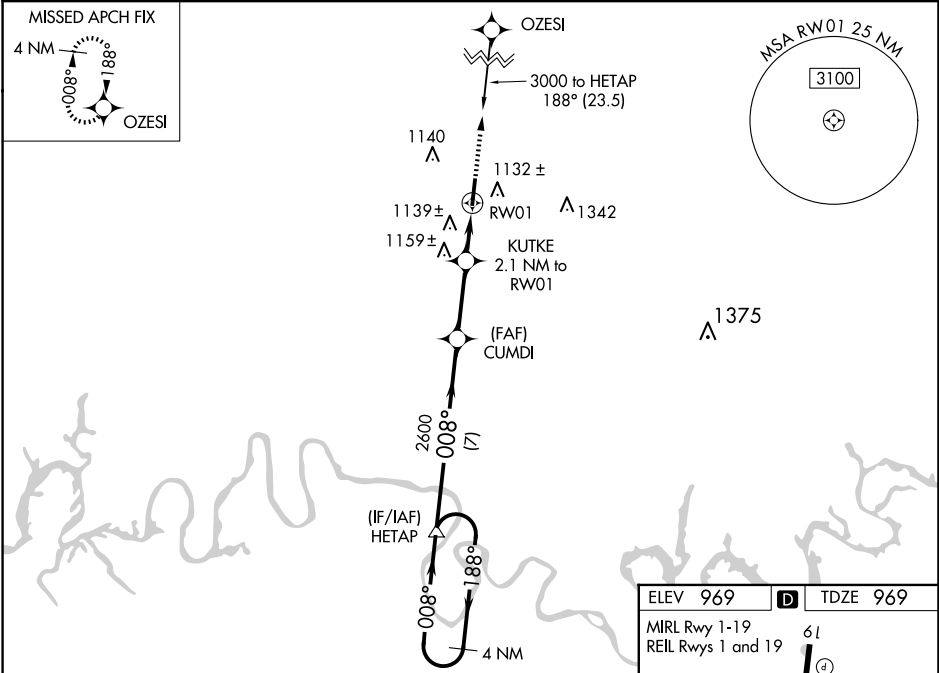

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026