
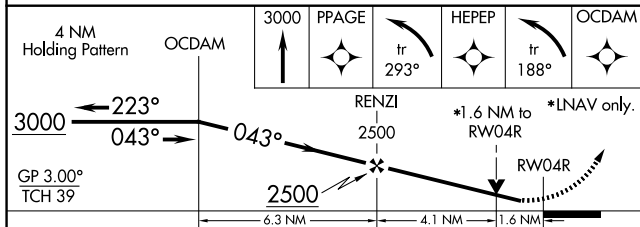


RNAV (GPS) RWY 4R


STANLY COUNTY (VUJ)

	Circling to Rwy 4L/22R NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 47°C (116.6°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Asheville altimeter setting and increase LPV DA to 929, LNAV/VNAV DA to 1083, and all MDA 60 feet; increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C and D, and Circling Cats C and D visibility ¼ mile. Baro-VNAV NA when using Asheville altimeter setting. VDP NA with Asheville altimeter setting.	MISSED APPROACH: Climb to 3000 direct PPAGE and left turn on track 293° to HEEPE and left turn on track 188° to OCDAMD and hold.
---	---	---

AWOS-3 128.175	CHARLOTTE APP CON 128.325 307.8	STANLY COUNTY TOWER★ 126.275 (CTAF) 0 291.9	GND CON 121.75 254.375	CLNC DEL 121.75 254.375
-------------------	------------------------------------	--	---------------------------	----------------------------

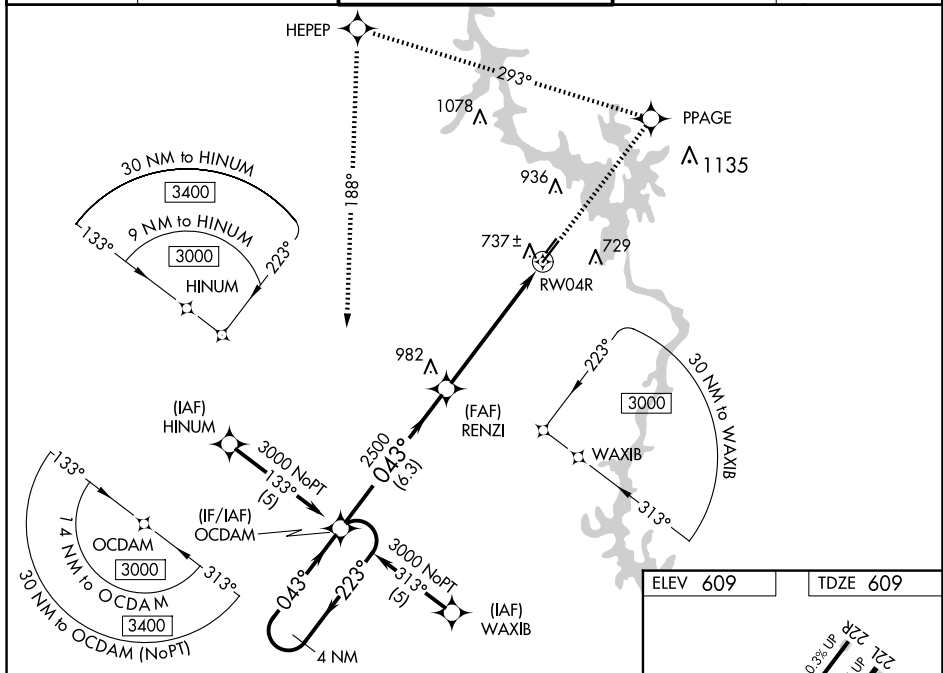

CATEGORY	A	B	C	D
LPV DA	876-1 267 (300-1)			
LNAV/ VNAV DA	1030-1½ 421 (500-1½)			
LNAV MDA	1160-1	551 (600-1)	1160-1½ 551 (600-1½)	1160-1¾ 551 (600-1¾)
CIRCLING	1260-1	651 (700-1)	1260-1¾ 651 (700-1¾)	1380-2½ 771 (800-2½)

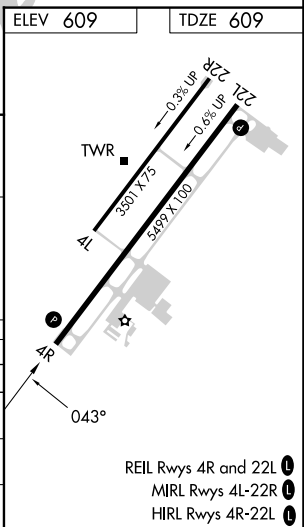

SE-2. 22 JAN 2026 to 19 FEB 2026