


WAAS CH 70422 W04A	APP CRS 036°	Rwy Ldg TDZE 3488 Apt Elev 3543
--	------------------------	---

RNAV (GPS) RWY 4

LAUREL MUNI (6S8)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Billings altimeter setting. Baro-VNAV and VDP NA when using Billings altimeter setting. Rwy 4 helicopter visibility reduction below ¾ SM NA.		MISSED APPROACH: Climb to 4300 then climbing right turn to 7000 direct JIBES and hold.
AWOS-3 135.05	BILLINGS APP CON 119.2 120.5 284.6	AUNICOM 123.05 (CTAF) 0

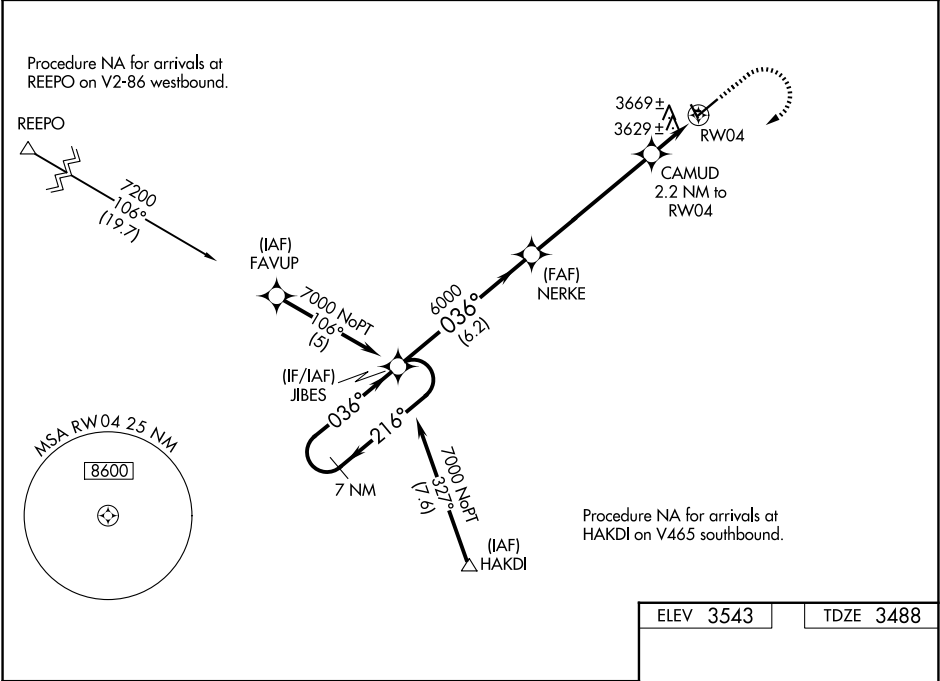

7 NM Holding Pattern		JIBES	NERKE	CAMUD 2.2 NM to RW04	*LNAV only.
7000		216°	036°	6000	
GP 3.00° TCH 33		036°	036°	*4220	
		6.2 NM	5.6 NM	0.8	1.4
CATEGORY	A	B	C	D	
LPV DA	3783-1 295 (300-1)				
LNAV/VNAV DA	3981-1¾ 493 (500-1¾)				
LNAV MDA	3980-1 492 (500-1)		3980-1¾ 492 (500-1¾)		

ELEV 3543 TDZE 3488

4300 7000 JIBES

CAMUD 2.2 NM to RW04

*1.4 NM to RW04

RW04

7100 60 X 60 27

5199 X 75 2.4% UP

3529

300 X 90 2.0% UP

036°

MIRL Rwy 4-22 and 14-32 0