

WAAS

CH **65725**

W32A

APP CRS

321°

Rwy Idg

3300

TDZE

20

Apt Elev

20

RNAV (GPS) RWY 32

HOOPER BAY (HPB) (PAHP)

RNP APCH - GPS.

▼


Rwy 32 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.

▲

Straight-in Rwy 32 NA at night, Circling Rwy 32 NA at night.

MISSED APPROACH: Climb to 2000 direct COYRA and hold.

AWOS-3P 135.1	ANCHORAGE CENTER 124.5	KENAI RADIO 122.4	CTAF 123.0
-------------------------	----------------------------------	-----------------------------	----------------------

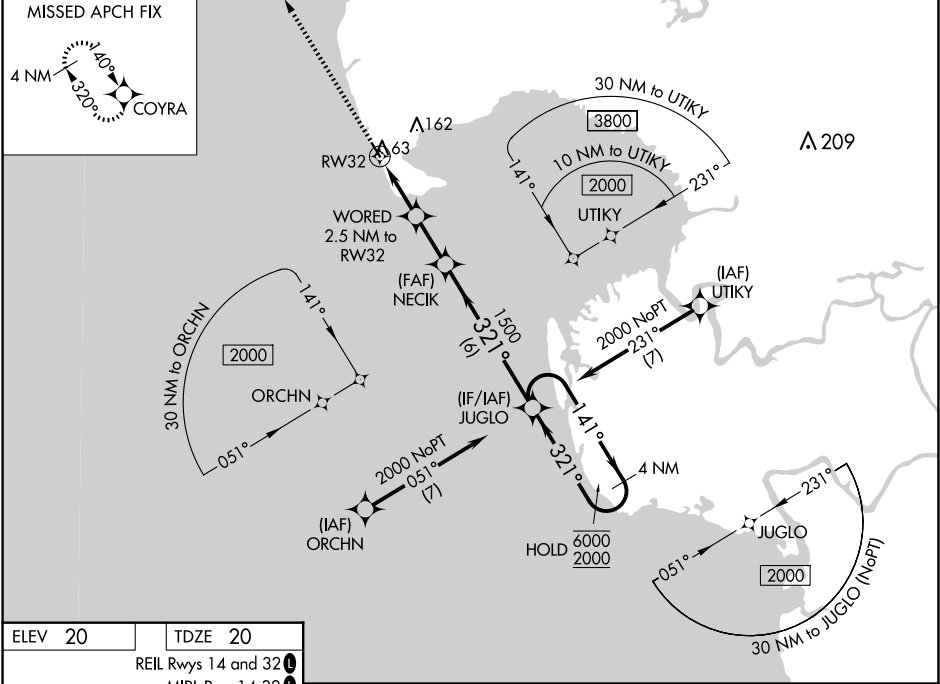

ELEV 20	TDZE 20	REIL Rwy 14 and 32 MIRL Rwy 14-32			
		2000	COYRA	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).	
			JUGLO	4 NM Holding Pattern	
		NECK	1500	321°	141°
		WORED	2.5 NM to RW32	840	1500
		RW32	2.5 NM	2 NM	6 NM
CATEGORY		A	B	C	D
LPV DA			270-1	250 (300-1)	
LNAV/VNAV DA			270-1	250 (300-1)	
LNAV MDA			320-1	300 (300-1)	
CIRCLING		400-1 380 (400-1)	480-1 460 (500-1)	480-1½ 460 (500-1½)	580-2 560 (600-2)