

WAAS CH 93909 W26A	APP CRS 263°	Rwy Ldg TDZE Apt Elev	8002 5489 5515
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 26

COLORADO AIR AND SPACE PORT (CFO)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C or above 48°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM, and increase LNAV Cat C/D visibility to 1¾ SM.

MALSRL

MISSED APPROACH: (Do not exceed 200K until LIMEX) Climb to 6100 then climbing left turn to 7600 direct LIMEX and hold.

ATIS 119.025	DENVER APP CON 128.25 371.95	SPACE PORT TOWER ★ 120.2 (CTAF) 0	GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
------------------------	--	---	-------------------------	--------------------------	--	-------------------------

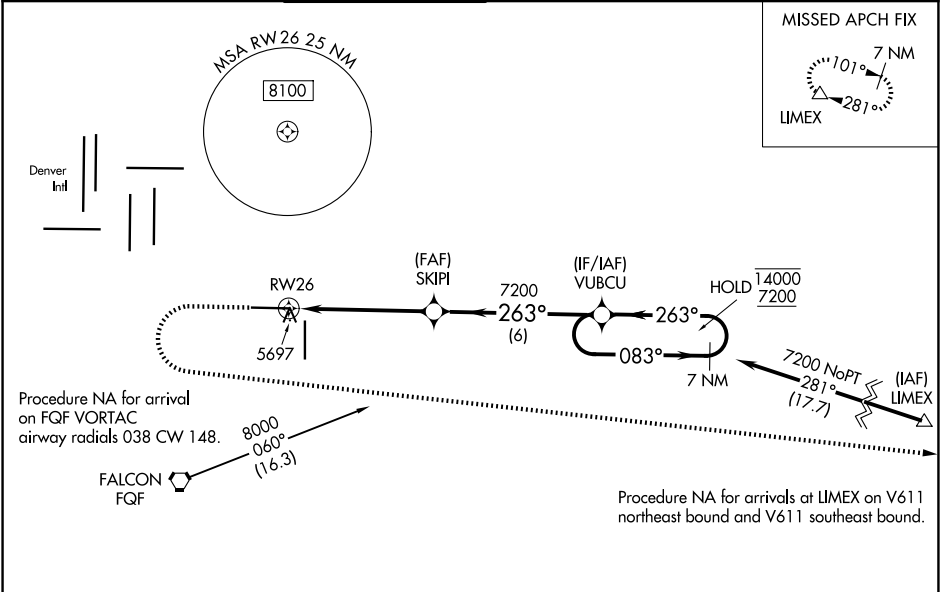

ELEV 5515		TDZE 5489	
6100		7600	
LIMEX		7200	
*LNAV only		*1.4 NM to RW26	
RW26		SKIPI	
7200		VUBCU	
7200		7200	
1.4 NM		3.8 NM	
6 NM		7 NM	
Holding Pattern		GP 3.00°	
TCH 50		0.5% UP	
0.4% DOWN		0.5% DOWN	
8002 X 100		8000 X 100	
26		35	
TWR		REIL Rwy 8 and 17	
HIRL Rwy 8-26		MIRL Rwy 17-35	
CATEGORY		A	
LPV DA		5689-½ 200 (200-½)	
LNAV/VNAV DA		5858-¾ 369 (400-¾)	
LNAV MDA		5960-½ 471 (500-½)	
CIRCLING		6000-1 485 (500-1)	