

APP CRS	Rwy Ldg	6669
229°	TDZE	76
	Apt Elev	76

RNAV (GPS) RWY 23

WILLISTON RGNL (X60)

RNP APCH.


T
A NA When local altimeter setting not received, use Ocala altimeter setting and increase all MDAs 60 feet and all Cat C visibilities $\frac{1}{4}$ SM. Circling Rwy 14, 32 NA at night. Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Circling NA to Rwy 18 and 36.

MISSED APPROACH:
Climb to 3000 direct
HUPOR and hold.

AWOS-3T
118.425

JACKSONVILLE APP CON
118.6 251.15


UNICOM
122.975 (CTAF) **L**

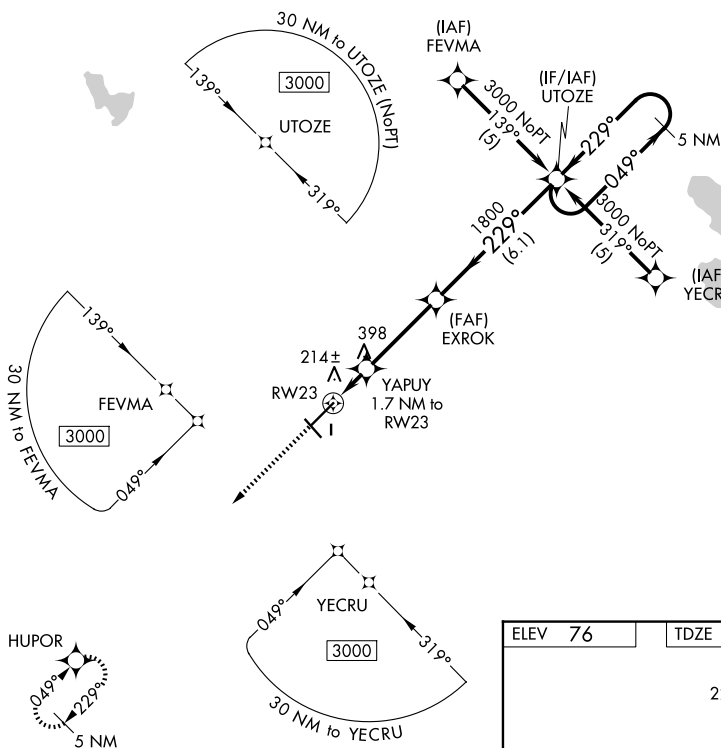


3000	HUPOR
	

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 35).

5 NM
Holding Pattern

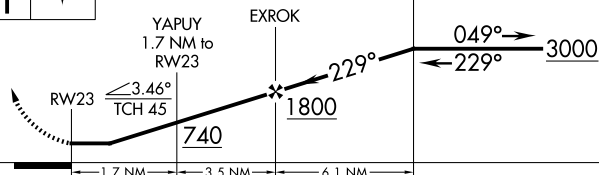

CATEGORY	A	B	C	D
LNAV MDA	480-1	404 (500-1)	480-1¼ 404 (500-1¼)	NA
CIRCLING	520-1 444 (500-1)	640-1 564 (600-1)	840-2¼ 764 (800-2¼)	NA

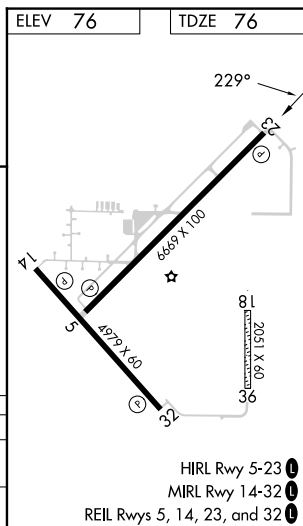

RNAV (GPS) RWY 23