

|                                                 |                        |                                                                 |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|
| LOC/DME I-SRR<br><b>110.7</b><br>Chan <b>44</b> | APP CRS<br><b>241°</b> | Rwy Idg <b>8120</b><br>TDZE <b>6771</b><br>Apt Elev <b>6814</b> |
|-------------------------------------------------|------------------------|-----------------------------------------------------------------|

ILS or LOC RWY 24


SIERRA BLANCA RGNL (SRR)

DME required.

Autopilot coupled approach NA below 7200. Circling Rwy 12 NA at night. When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 7500 then climbing left turn to 11000 on heading 110° and on CME VORTAC R-263 to BREDD/CME 30 DME and hold, continue climb-in-hold to 11000.

|                          |                                           |                                 |
|--------------------------|-------------------------------------------|---------------------------------|
| AWOS-3<br><b>126.475</b> | ALBUQUERQUE CENTER<br><b>132.65 257.6</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-------------------------------------------|---------------------------------|

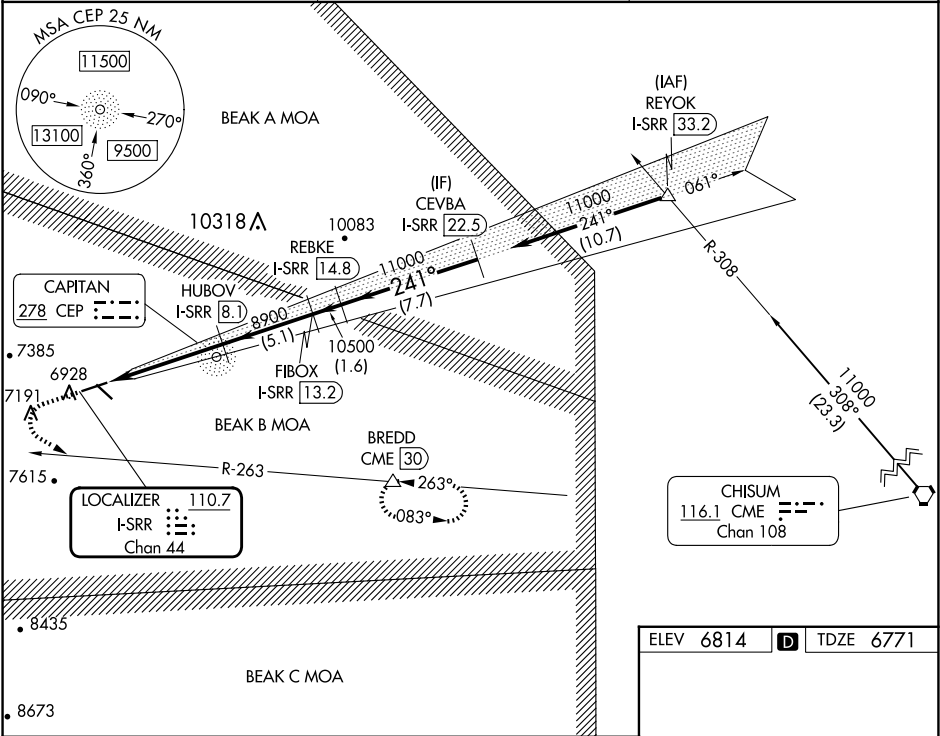

|           |                        |                 |                  |                                             |                  |                  |
|-----------|------------------------|-----------------|------------------|---------------------------------------------|------------------|------------------|
| 7500      | 11000                  | CME R-263       | BREDD            | Use I-SRR DME when on the localizer course. | REBKE I-SRR 14.8 | CEVBA I-SRR 22.5 |
| hdg 110°  |                        |                 |                  |                                             |                  |                  |
| I-SRR 1.5 | I-SRR 3.3              | HUBOV I-SRR 8.1 | FIBOX I-SRR 13.2 | 10500                                       | 11000            | GS 3.00° TCH 51  |
| 1.8 NM    | 4.8 NM                 | 5.1 NM          | 1.6 NM           | 7.7 NM                                      |                  |                  |
| CATEGORY  | A                      | B               | C                | D                                           |                  |                  |
| S-ILS 24  | 6974-3/4 203 (200-3/4) |                 |                  |                                             |                  |                  |
| S-LOC 24  | 7340-1                 | 569 (600-1)     | 7340-1 5/8       | 569 (600-1 5/8)                             |                  |                  |
| CIRCLING  | 7340-1                 | 526 (600-1)     | 7600-2 1/4       | 7860-3                                      | 1046 (1100-3)    |                  |

