


VORTAC CWK	APP CRS	Rwy Ldg
112.8	194°	4000
Chan 75		TDZE 600
		Apt Elev 600

VOR RWY 17
TAYLOR MUNI (T74)

DME required. ⚠ Circling Rwy 35 NA at night. Rwy 17 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Austin Exec altimeter setting and increase all MDA 40 feet. VDP NA when using Austin Exec altimeter setting.		MISSED APPROACH: Climbing right turn to 2500 on CWK VORTAC R-014 to ESDEF/17.6 DME and hold.
AWOS-3PT 119.75	AUSTIN APP CON 127.225 317.65	UNICOM 122.8 (CTAF) 0

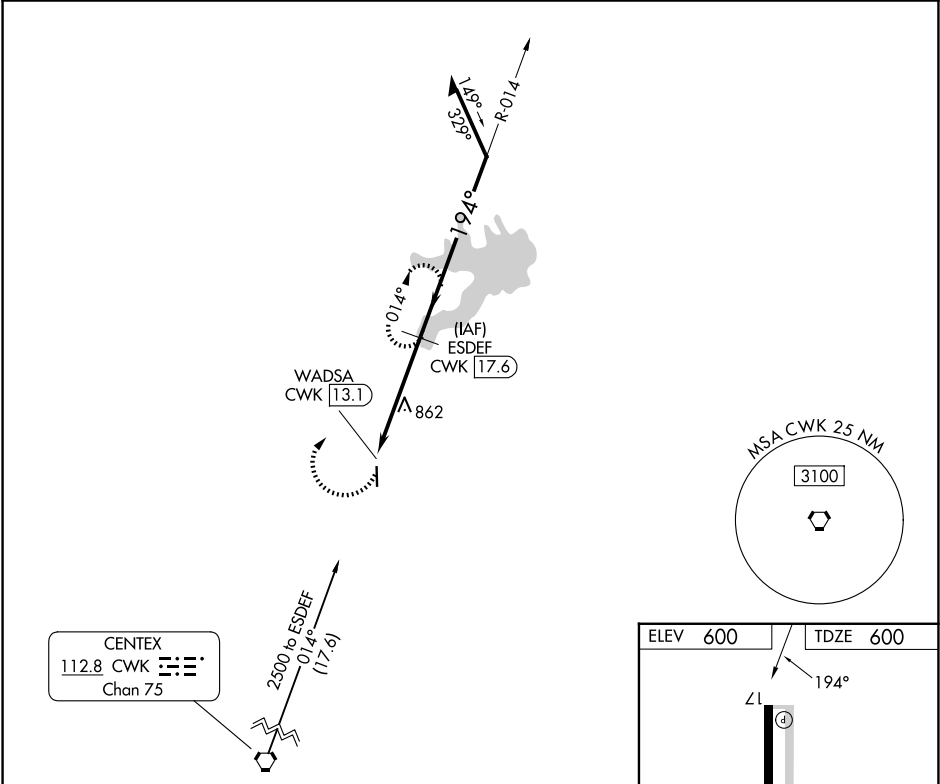

2500 CWK R-014		ESDEF CWK 17.6	ESDEF CWK 17.6		Remain within 10 NM
WADSA CWK 13.1		CWK 14.4	2200		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).
0.3		1.4	3.2 NM		
CATEGORY	A	B	C	D	
S-17	1180-1	580 (600-1)	NA		
CIRCLING	1180-1	580 (600-1)	NA		

