


WAAS CH 93924 W36A	APP CRS 005°	Rwy Ldg TDZE 246 Apt Elev 247
--	------------------------	---

RNAV (GPS) RWY 36
CHARLES W BAKER (2M8)

RNP APCH - GPS. Baro-VNAV and VDP NA when using NQA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Rwy 36 helicopter visibility reduction below ¾ SM NA. Circling Rwy 18 NA at night. When local altimeter setting not received, use NQA altimeter setting: increase LPV DA to 643 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 707 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 900 then climbing left turn to 3000 direct OZSOM and hold, continue climb-in-hold to 3000.
---	--

AWOS-3PT 119.575	MEMPHIS APP CON 125.8 338.3	UNICOM 122.8 (CTAF)
----------------------------	---------------------------------------	-------------------------------

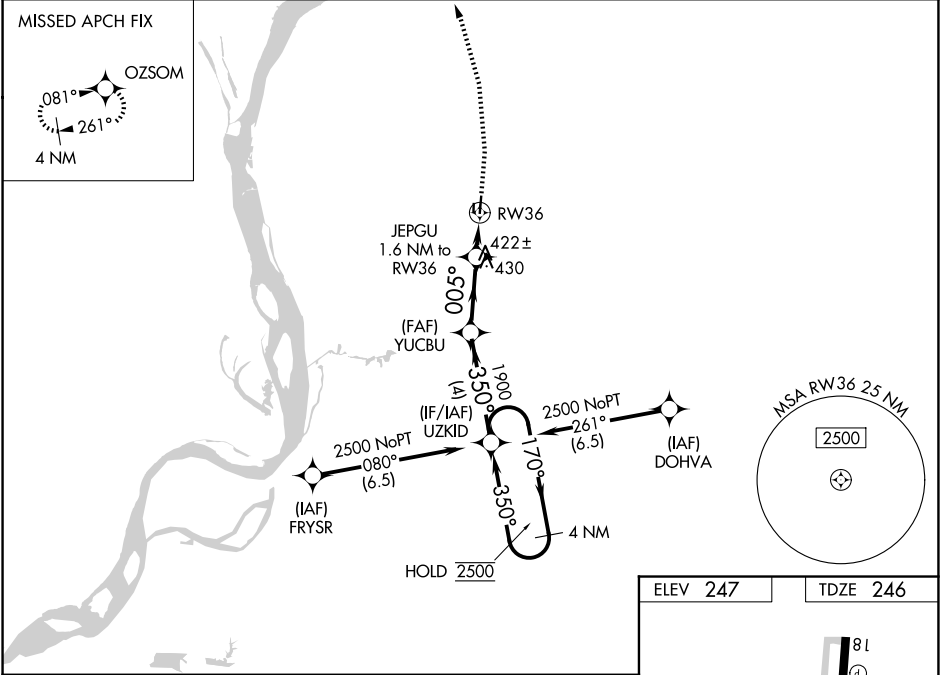

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 40).		900	3000	OZSOM
UZKID		YUCBU		JEGPU	RW36	
2500		1900		1.6 NM to		RW36
GP 3.50°		005°		0.9 NM to		RW36
TCH 53		880		RW36		
4 NM		2.7 NM		0.6		0.9
CATEGORY	A	B	C	D		
LPV DA	619-1	373 (400-1)		NA		
LNAV/VNAV DA	683-1¼	437 (500-1¼)		NA		
LNAV MDA	680-1	434 (500-1)	680-1¼ 434 (500-1¼)	NA		
CIRCLING	760-1 513 (600-1)	860-1 613 (700-1)	900-1¾ 653 (700-1¾)	NA		

