WAAS CH 60939 W04A	APP CRS 045°	Rwy ldg 5002 TDZE 112 Apt Elev 112

RNAV (GPS) RWY 4
DEMOPOLIS RGNL (DYA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Marion altimeter setting and increase LPV and LNAV/VNAV DA 82 feet and all MDA 100 feet; increase LPV and LNAV/VNAV all Cats visibility 3/8 mile, increase LNAV Cats C/D and Circling Cat C visibility 1/4 mile, and increase Circling Cat D visibility 1/2 mile. Baro-VNAV and VDP NA when using Marion altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct CUBNO and hold.

AWOS-3P	MERIDIAN APP CON*	UNICOM
119.475	121.275 348.7	122.8 (CTAF) L

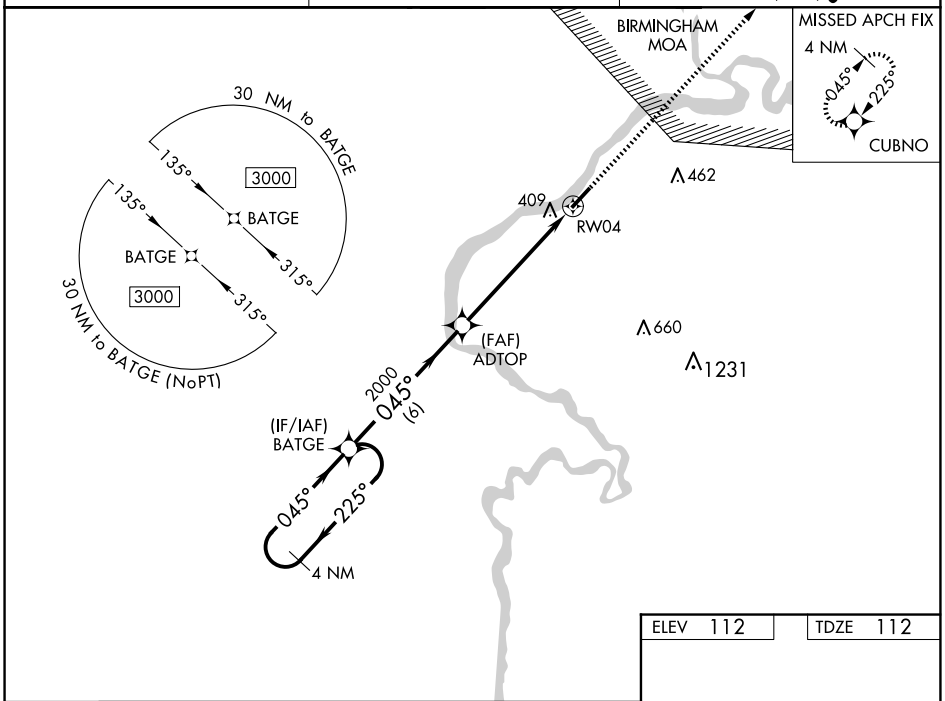

ELEV 112 TDZE 112

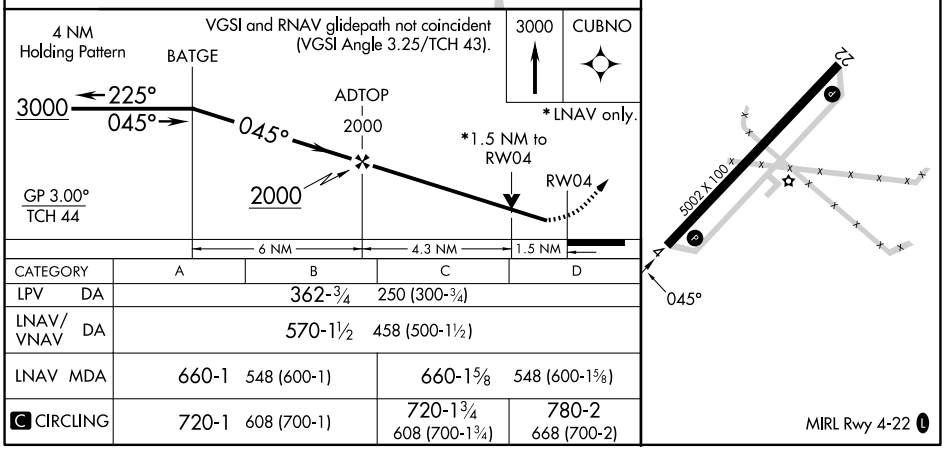

CATEGORY	A	B	C	D
LPV DA	362-3/4 250 (300-3/4)			
LNAV/VNAV DA	570-1 1/2 458 (500-1 1/2)			
LNAV MDA	660-1 548 (600-1)		660-1 5/8 548 (600-1 5/8)	
C CIRCLING	720-1 608 (700-1)		720-1 3/4 608 (700-1 3/4)	780-2 668 (700-2)

SE-4, 22 JAN 2026 to 19 FEB 2026
SE-4, 22 JAN 2026 to 19 FEB 2026