


WAAS CH 72946 W05A	APP CRS 050°	Rwy Idg 5000 TDZE 65 Apt Elev 65
--	------------------------	---

RNAV (GPS) RWY 5

MARION COUNTY (X35)

RNP APCH - GPS. ▼ NA Rwy 5 helicopter visibility reduction below 1 SM NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase all MDAs 60 feet and LNAV and LP visibility Cat C/D ¼ SM and Circling visibility Cat D ¼ SM. Straight-in Rwy 5 NA at night, Circling Rwy 5, 10, 28 NA at night.	MISSED APPROACH: Climb to 600 then climbing left turn to 1700 direct EMMIT and hold.
OCF AWOS-3PT 128.125	JACKSONVILLE APP CON 118.6 251.15
UNICOM 122.8 (CTAF) 0	

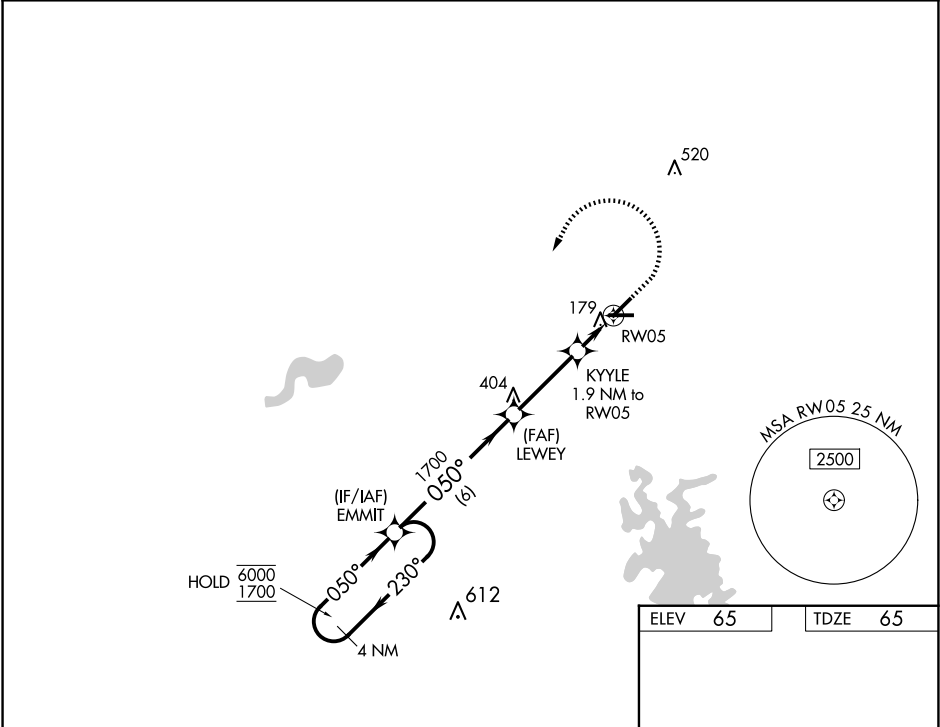

4 NM Holding Pattern		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 28).		600	1700	EMMIT
EMMIT		LEWEY		KYYLE 1.9 NM to RW05		
6000 1700		230° 050°		3.00° TCH 40		
6000 1700		050°		680		
6 NM		3.2 NM		1.8 NM		
CATEGORY	A	B	C	D		
LP MDA	500-1	435 (500-1)	500-1¼	435 (500-1¼)		
LNAV MDA	540-1	475 (500-1)	540-1⅜	475 (500-1⅜)		
CIRCLING	540-1	475 (500-1)	580-1½ 515 (600-1½)	760-2¼ 695 (700-2¼)		

