


WAAS CH 61142 W01A	APP CRS 011°	Rwy Ldg TDZE 89 Apt Elev 92
--	------------------------	---

RNAV (GPS) RWY 1

NOATAK (WTK)(PAWN)

RNP APCH-GPS.		MISSED APPROACH: Climb to 1000 then climbing right turn to 3400 direct FITSU and hold.	
	For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C. Circling Rwy 19 NA at night.		
AWOS-3P 135.75	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 122.4	UNICOM 122.8 (CTAF) 0

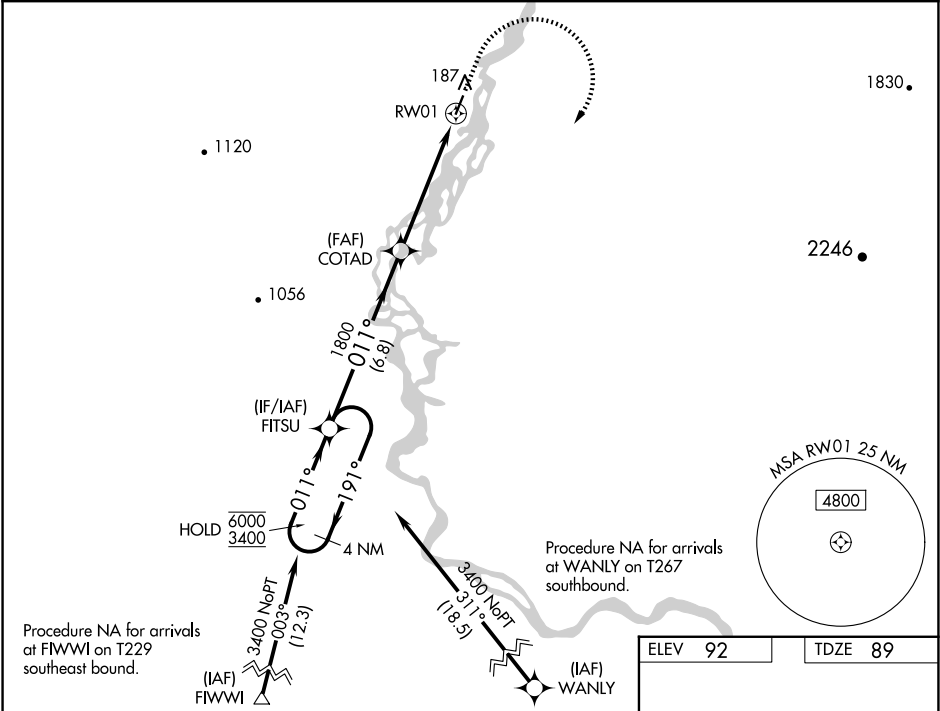

4 NM Holding Pattern		FITSU	COTAD	1000 	3400 	FITSU
6000 3400	← 191° 011° →	011°	1800	1.3 NM to RW01	RW01	
GP 3.00° TCH 30		1800				
		6.8 NM	4 NM	1.3 NM		
CATEGORY	A	B	C	D		
LPV DA	339-1		250 (300-1)			
LNAV/ VNAV DA	339-1		250 (300-1)			
LNAV MDA	520-1 431 (500-1)		520-1¼ 431 (500-1¼)			
CIRCLING	520-1 428 (500-1)	560-1 468 (500-1)	560-1½ 468 (500-1½)	820-2¼ 728 (800-2¼)		

