


WAAS CH 70633 W34A	APP CRS 339°	Rwy Ldg TDZE 1364 Apt Elev 1368
--	------------------------	---

RNAV (GPS) RWY 34

WADENA MUNI (ADC)

RNP APCH - GPS.	MISSED APPROACH: Climb to 3300 direct WENVI and hold.
Baro-VNAV and VDP NA when using SAZ altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy's 3 and 21. When local altimeter setting not received, use SAZ altimeter setting and increase LPV DA to 1665 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1842 feet and all visibilities ¼ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.	

AWOS-3PT 118.875	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
----------------------------	--	-----------------------	---------------------------------

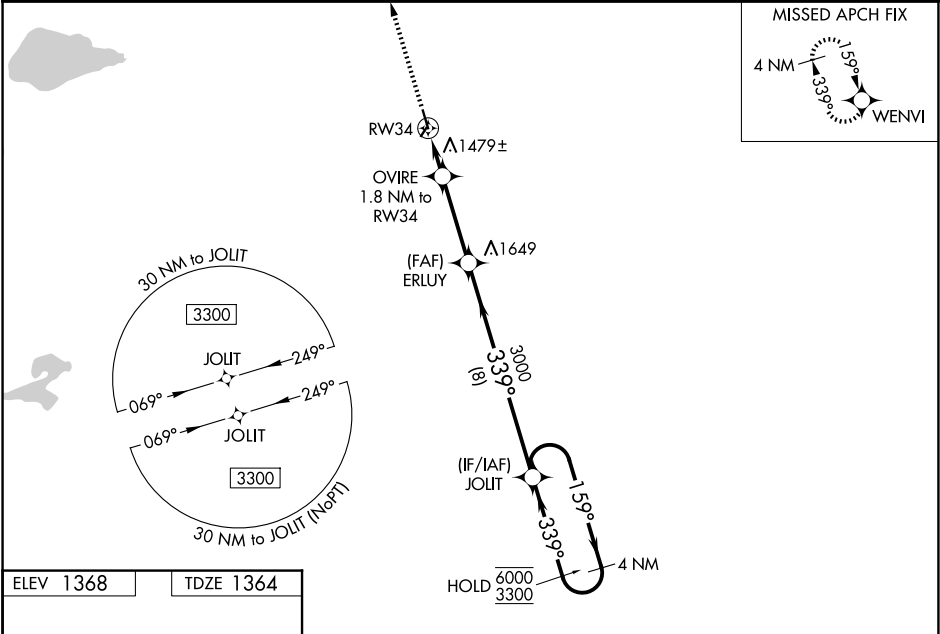

MRL Rwy 16-34
REL Rws 16 and 34

3300 WENVI

OVIRE 1.8 NM to RW34

ERLUY 3000

JOLIT 4 NM Holding Pattern

159° 6000 3300

339° 339°

1960 3000

1.1 NM 0.7 NM 3.2 NM 8 NM

GP 3.00° TCH 42

CATEGORY	A	B	C	D
LPV DA	1614-1 250 (300-1)			NA
LNAV/VNAV DA	1791-1½ 427 (500-1½)			NA
LNAV MDA	1740-1	376 (400-1)	1740-1⅛ 376 (400-1⅛)	NA
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1½ 572 (600-1½)	NA